

Deep Groove Ball Bearings



SINGLE-ROW DEEP GROOVE BALL BEARINGS

Open Type, Shielded Type, Sealed Type
Open Type

Bore Dia.	Page
10 - 240 mm.....	B8
260 - 800 mm.....	B24

MAXIMUM TYPE BALL BEARINGS

Bore Dia.	Page
25 - 110 mm.....	B32

MAGNETO BEARINGS

Bore Dia.	Page
4 - 20 mm.....	B34

Extra Small and Miniature Ball Bearings are described on Pages B36 to B51.

DESIGN, TYPES, AND FEATURES

SINGLE-ROW DEEP GROOVE BALL BEARINGS

Single-Row Deep Groove Ball Bearings are classified into the types shown below. The proper amount of good quality grease is packed in shielded and sealed ball bearings. A comparison of the features of each type is shown in Table 1.

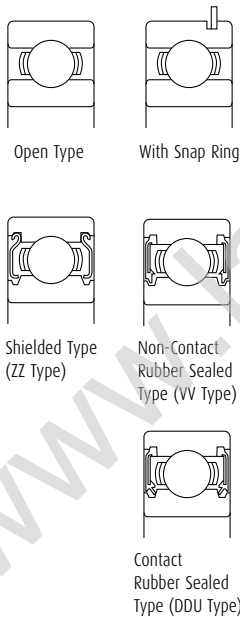


Table 1 Features of Sealed Ball Bearings

Type	Shielded Type (ZZ Type)	Non-Contact Rubber Sealed Type (VV Type)	Contact Rubber Sealed Type (DDU Type)
Torque	Low	Low	Higher than ZZ, VV types due to contact seal
Speed capability	Good	Good	Limited by contact seals
Grease sealing effectiveness	Good	Better than ZZ type	A little better than VV type
Dust resistance	Good	Better than ZZ type (usable in moderately dusty environment)	Best (usable even in very dusty environment)
Water resistance	Not suitable	Not suitable	Good (usable even if fluid is splashed on bearing)
Operating temperature (1)	-10 to +110°C	-10 to +110°C	-10 to +100°C


Note (1) The above temperature range applies to standard bearings. By using cold or heat resistant grease and changing the type of rubber, the operating temperature range can be extended. For such applications, please contact NSK.

Deep Groove Ball Bearings

For deep groove ball bearings, pressed cages are usually used. For big bearings, machined brass cages are used. (Refer to Table 2)
Machined cages are also used for high speed applications.

Table 2 Standard Cages for Deep Groove Ball Bearings

Series	Pressed Steel Cages	Machined Brass Cages
68	6800 - 6838	6840 - 68/800
69	6900 - 6936	6938 - 69/800
160	16001 - 16026	16028 - 16064
60	6000 - 6040	6044 - 60/670
62	6200 - 6240	6244 - 6272
63	6300 - 6332	6334 - 6356




MAXIMUM TYPE BALL BEARINGS

Maximum Type Ball Bearings contain a larger number of balls than normal deep groove ball bearings because of filling slots in the inner and outer rings. Because of their filling slots, they are not suitable for applications with high axial loads.

BL2 and BL3 types of bearings have boundary dimensions equal to those of single-row deep groove ball bearings of Series 62 and 63 respectively. Besides the open type, ZZ type shielded bearings are also available.

When using these bearings, it is important for the filling slot in the outer ring to be outside of the loaded zone as much as possible.

Their cages are pressed steel.



MAGNETO BEARINGS

The groove in the inner ring is a little shallower than that of deep groove ball bearings and one side of the outer ring is relieved. Consequently, the outer ring is separable, which makes it convenient for mounting.

Pressed cages are standard, but for high speed applications, machined synthetic resin cages are used.

PRECAUTIONS FOR USE OF DEEP GROOVE BALL BEARINGS

For deep groove ball bearings, if the bearing load is too small during operation, slippage occurs between the balls and raceways, which may result in smearing. The higher the weight of balls and cage, the higher this tendency becomes, especially for large bearings. If very small bearing loads are expected, please contact NSK for selection of an appropriate bearing.

TOLERANCES AND RUNNING ACCURACY

Single-Row Deep Groove Ball Bearings
Maximum Type Ball Bearings
Magneto Bearings

Table	Pages
8.2	A62 to A65
8.2	A62 to A65
8.5	A72 and A73

RECOMMENDED FITS

Single-Row Deep Groove Ball Bearings

Maximum Type Ball Bearings

Magneto Bearings

Table	Page
9.2	A86
9.4	A87
9.2	A86
9.4	A87
9.2	A86
9.4	A87

INTERNAL CLEARANCE

Single-Row Deep Groove Ball Bearings
Maximum Type Ball Bearings
Magneto Bearings


Table	Page
9.9	A91
9.9	A91
9.11	A91

LIMITING SPEEDS

The limiting speeds listed in the bearing tables should be adjusted depending on the bearing load conditions. Also, higher speeds are attainable by making changes in the lubrication method, cage design, etc. Refer to Page A39 for detailed information.


Single-Row Deep Groove Ball Bearings

Bore Diameter 10 – 17 mm

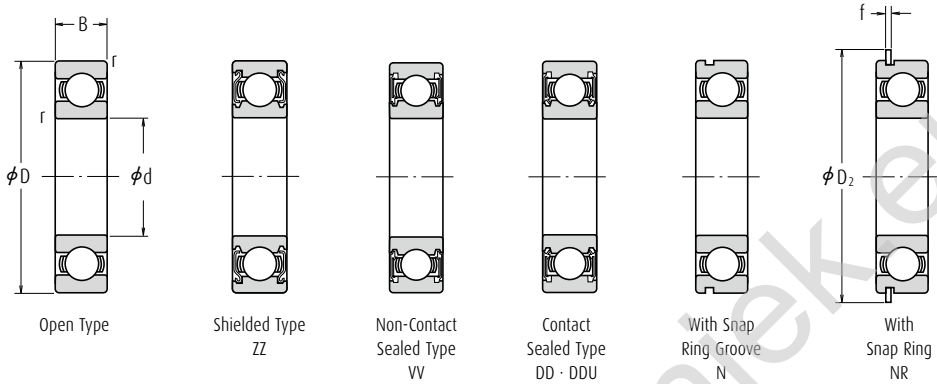

Boundary Dimensions (mm)				Basic Load Ratings (N) (kgf)				Factor f_0	Limiting Speeds (min ⁻¹)			Bearing Numbers			
d	D	B	r min.	C_r	C_{or}	C_r	C_{or}		Grease Open Z · ZZ V · VV	Oil DU DDU	Oil Open Z	Open	Shielded	Sealed	
10	19	5	0.3	1 720	840	175	86	14.8	34 000	24 000	40 000	6800	ZZ	VV	DD
	22	6	0.3	2 700	1 270	275	129	14.0	32 000	22 000	38 000	6900	ZZ	VV	DD
	26	8	0.3	4 550	1 970	465	201	12.4	30 000	22 000	36 000	6000	ZZ	VV	DDU
	30	9	0.6	5 100	2 390	520	244	13.2	24 000	18 000	30 000	6200	ZZ	VV	DDU
	30	9	0.6	5 350	2 390	—	—	13.2	28 000	18 000	34 000	6200 [†]	ZZ	VV	DDU
	35	11	0.6	8 100	3 450	825	350	11.2	22 000	17 000	26 000	6300	ZZ	VV	DDU
12	35	11	0.6	8 500	3 450	—	—	11.2	26 000	17 000	30 000	6300 [†]	ZZ	VV	DDU
	21	5	0.3	1 920	1 040	195	106	15.3	32 000	20 000	38 000	6801	ZZ	VV	DD
	24	6	0.3	2 890	1 460	295	149	14.5	30 000	20 000	36 000	6901	ZZ	VV	DD
	28	7	0.3	5 100	2 370	520	241	13.0	28 000	—	32 000	16001	—	—	—
	28	8	0.3	5 100	2 370	520	241	13.0	28 000	18 000	32 000	6001	ZZ	VV	DDU
	28	8	0.3	5 350	2 370	—	—	13.0	32 000	18 000	38 000	6001 [†]	ZZ	VV	DDU
15	32	10	0.6	6 800	3 050	695	310	12.3	22 000	17 000	28 000	6201	ZZ	VV	DDU
	32	10	0.6	7 150	3 050	—	—	12.3	26 000	17 000	32 000	6201 [†]	ZZ	VV	DDU
	37	12	1	9 700	4 200	990	425	11.1	20 000	16 000	24 000	6301	ZZ	VV	DDU
	37	12	1.0	10 200	4 200	—	—	11.1	24 000	16 000	28 000	6301 [†]	ZZ	VV	DDU
	24	5	0.3	2 070	1 260	212	128	15.8	28 000	17 000	34 000	6802	ZZ	VV	DD
	28	7	0.3	4 350	2 260	440	230	14.3	26 000	17 000	30 000	6902	ZZ	VV	DD
17	32	8	0.3	5 600	2 830	570	289	13.9	24 000	—	28 000	16002	—	—	—
	32	9	0.3	5 600	2 830	570	289	13.9	24 000	15 000	28 000	6002	ZZ	VV	DDU
	32	9	0.3	5 850	2 830	—	—	13.9	26 000	15 000	32 000	6002 [†]	ZZ	VV	DDU
	35	11	0.6	7 650	3 750	780	380	13.2	20 000	14 000	24 000	6202	ZZ	VV	DDU
	35	11	0.6	8 000	3 750	—	—	13.2	22 000	14 000	28 000	6202 [†]	ZZ	VV	DDU
	42	13	1	11 400	5 450	1 170	555	12.3	17 000	13 000	20 000	6302	ZZ	VV	DDU
17	42	13	1.0	12 000	5 450	—	—	12.3	20 000	13 000	24 000	6302 [†]	ZZ	VV	DDU
	26	5	0.3	2 630	1 570	268	160	15.7	26 000	15 000	30 000	6803	ZZ	VV	DD
	30	7	0.3	4 600	2 550	470	260	14.7	24 000	15 000	28 000	6903	ZZ	VV	DDU
	35	8	0.3	6 000	3 250	610	330	14.4	22 000	—	26 000	16003	—	—	—
	35	10	0.3	6 000	3 250	610	330	14.4	22 000	13 000	26 000	6003	ZZ	VV	DDU
	35	10	0.3	6 300	3 250	—	—	14.4	24 000	13 000	28 000	6003 [†]	ZZ	VV	DDU
40	40	12	0.6	9 550	4 800	975	490	13.2	17 000	12 000	20 000	6203	ZZ	VV	DDU
	40	12	0.6	10 100	4 800	—	—	13.2	20 000	12 000	24 000	6203 [†]	ZZ	VV	DDU
	47	14	1	13 600	6 650	1 390	675	12.4	15 000	11 000	18 000	6303	ZZ	VV	DDU
	47	14	1.0	14 300	6 650	—	—	12.4	18 000	11 000	20 000	6303 [†]	ZZ	VV	DDU

- Notes**
- (1) For tolerances for the snap ring grooves and snap ring dimensions, refer to Pages A52 to A55.
 - (2) When heavy axial loads are applied, increase d_a and decrease D_a from the above values.
 - (3) Ring types N and NR applicable only to open-type bearings.

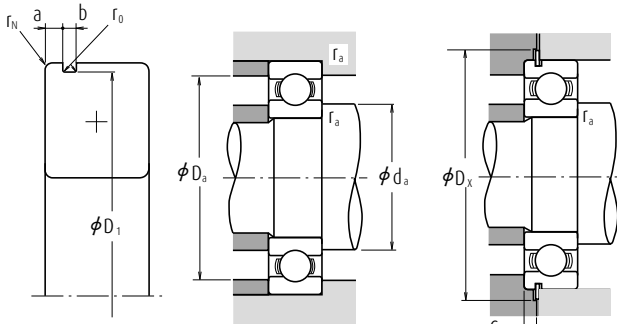

Dynamic Equivalent Load $P=XF_r+YF_a$

$\frac{f_a F_a}{C_{or}}$	e	$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.30
0.345	0.22	1	0	0.56	1.99
0.689	0.26	1	0	0.56	1.71
1.03	0.28	1	0	0.56	1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34	1	0	0.56	1.31
3.45	0.38	1	0	0.56	1.15
5.17	0.42	1	0	0.56	1.04
6.89	0.44	1	0	0.56	1.00

Static Equivalent Load

$$\frac{F_a}{F_r} > 0.8, P_0 = 0.6F_r + 0.5F_a$$

$$\frac{F_a}{F_r} \leq 0.8, P_0 = F_r$$

With Snap Ring Groove	With Snap Ring	Snap Ring Groove Dimensions (1) (mm)					Snap Ring (1) Dimensions (mm)		Abutment and Fillet Dimensions (mm)						Mass (kg) approx.
		a max.	b min.	D ₁ max.	r ₀ max.	r _N min.	D ₂ max.	f max.	d _s (2) min.	d _s (2) max.	r _a max.	D _x min.	C _y max.		
—	—	—	—	—	—	—	—	12	12	17	0.3	—	—	0.005	
N(*)	NR(*)	1.05	0.80	20.80	0.20	0.2	24.8	0.70	12	12.5	20	0.3	25.5	1.5	0.009
N(*)	NR(*)	1.35	0.87	24.50	0.20	0.3	28.7	0.84	12	13	24	0.3	29.4	1.9	0.018
N	NR	2.06	1.35	28.17	0.40	0.5	34.7	1.12	14	16	26	0.6	35.5	2.9	0.032
N	NR	2.06	1.35	28.17	0.40	0.5	34.7	1.12	14	16	26	0.6	35.5	2.9	0.032
N	NR	2.06	1.35	33.17	0.40	0.5	39.7	1.12	14	16.5	31	0.6	40.5	2.9	0.052
N	NR	2.06	1.35	33.17	0.40	0.5	39.7	1.12	14	16.5	31	0.6	40.5	2.9	0.052
—	—	—	—	—	—	—	—	—	14	14	19	0.3	—	—	0.006
N	NR	1.05	0.80	22.80	0.20	0.2	26.8	0.70	14	14.5	22	0.3	27.5	1.5	0.010
—	—	—	—	—	—	—	—	—	14	—	26	0.3	—	—	0.019
N(*)	NR(*)	1.35	0.87	26.50	0.20	0.3	30.7	0.84	14	15.5	26	0.3	31.4	1.9	0.022
N(*)	NR(*)	1.35	0.87	26.50	0.20	0.3	30.7	0.84	14	15.5	26	0.3	31.4	1.9	0.022
N	NR	2.06	1.35	30.15	0.40	0.5	36.7	1.12	16	17	28	0.6	37.5	2.9	0.037
N	NR	2.06	1.35	30.15	0.40	0.5	36.7	1.12	16	17	28	0.6	37.5	2.9	0.037
N	NR	2.06	1.35	34.77	0.40	0.5	41.3	1.12	17	18	32	1	42	2.9	0.060
N	NR	2.06	1.35	34.77	0.40	0.5	41.3	1.12	17	18	32	1	42	2.9	0.060
—	—	—	—	—	—	—	—	—	17	17	22	0.3	—	—	0.007
N	NR	1.30	0.95	26.70	0.25	0.3	30.8	0.85	17	17	26	0.3	31.5	1.8	0.015
—	—	—	—	—	—	—	—	—	17	—	30	0.3	—	—	0.027
N	NR	2.06	1.35	30.15	0.40	0.3	36.7	1.12	17	19	30	0.3	37.5	2.9	0.031
N	NR	2.06	1.35	30.15	0.40	0.3	36.7	1.12	17	19	30	0.3	37.5	2.9	0.031
N	NR	2.06	1.35	33.17	0.40	0.5	39.7	1.12	19	20.5	31	0.6	40.5	2.9	0.045
N	NR	2.06	1.35	33.17	0.40	0.5	39.7	1.12	19	20.5	31	0.6	40.5	2.9	0.045
N	NR	2.06	1.35	39.75	0.40	0.5	46.3	1.12	20	22.5	37	1	47	2.9	0.083
N	NR	2.06	1.35	39.75	0.40	0.5	46.3	1.12	20	22.5	37	1	47	2.9	0.083
—	—	—	—	—	—	—	—	—	19	19	24	0.3	—	—	0.007
N	NR	1.30	0.95	28.70	0.25	0.3	32.8	0.85	19	19.5	28	0.3	33.5	1.8	0.017
—	—	—	—	—	—	—	—	—	19	—	33	0.3	—	—	0.033
N	NR	2.06	1.35	33.17	0.40	0.3	39.7	1.12	19	21.5	33	0.3	40.5	2.9	0.041
N	NR	2.06	1.35	33.17	0.40	0.3	39.7	1.12	19	21.5	33	0.3	40.5	2.9	0.041
N	NR	2.06	1.35	38.10	0.40	0.5	44.6	1.12	21	23.5	36	0.6	45.5	2.9	0.067
N	NR	2.06	1.35	38.10	0.40	0.5	44.6	1.12	21	23.5	36	0.6	45.5	2.9	0.067
N	NR	2.46	1.35	44.60	0.40	0.5	52.7	1.12	22	25.5	42	1	53.5	3.3	0.113
N	NR	2.46	1.35	44.60	0.40	0.5	52.7	1.12	22	25.5	42	1	53.5	3.3	0.113


Note (*) Snap ring groove dimensions and snap ring dimensions are not conformed to ISO15.

Remarks

1. Bearings marked with an asterisk (*) are NSKHPS bearings.
2. Diameter Series 7 (extra thin section bearings) are also available, please contact NSK.
3. When using bearings with rotating outer rings, contact NSK if they are sealed, shielded, or have snap rings.


Single-Row Deep Groove Ball Bearings

Bore Diameter 20 – 32 mm

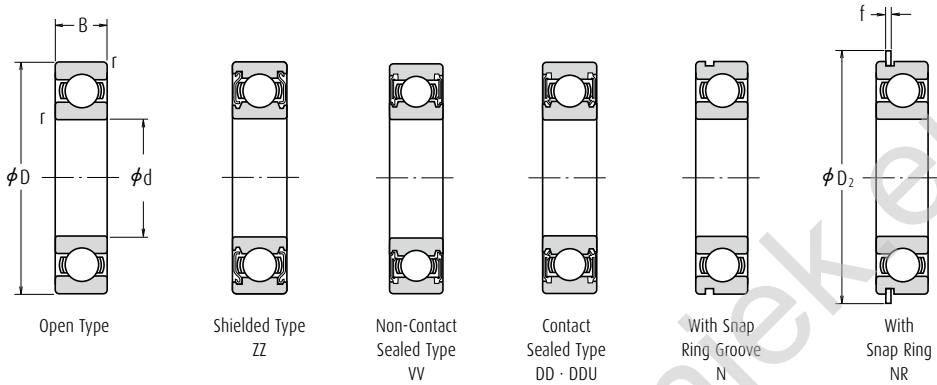

Boundary Dimensions (mm)				Basic Load Ratings (N) (kgf)				Factor f_0	Limiting Speeds (min ⁻¹)			Bearing Numbers				
d	D	B	r min.	C_r	C_{or}	C_r	C_{or}		Grease Open Z · ZZ V · VV	Oil DU DDU	Open Z	Open	Shielded	Sealed		
20	32	7	0.3	4 000	2 470	410	252	15.5	22 000	13 000	26 000	6804	ZZ	VV	DD	
	37	9	0.3	6 400	3 700	650	375	14.7	19 000	12 000	22 000	6904	ZZ	VV	DDU	
	42	8	0.3	7 900	4 450	810	455	14.5	18 000	—	20 000	16004	—	—	—	
	42	12	0.6	9 400	5 000	955	510	13.8	18 000	11 000	20 000	6004	ZZ	VV	DDU	
	42	12	0.6	9 850	5 000	—	—	13.8	20 000	11 000	24 000	6004 [†]	ZZ	VV	DDU	
	47	14	1	12 800	6 600	1 300	670	13.1	15 000	11 000	18 000	6204	ZZ	VV	DDU	
	47	14	1.0	13 400	6 600	—	—	13.1	17 000	11 000	20 000	6204 [†]	ZZ	VV	DDU	
	52	15	1.1	15 900	7 900	1 620	805	12.4	14 000	10 000	17 000	6304	ZZ	VV	DDU	
	52	15	1.1	16 700	7 900	—	—	12.4	16 000	10 000	19 000	6304 [†]	ZZ	VV	DDU	
	54	14	0.6	9 400	5 050	960	515	14.0	17 000	11 000	20 000	60/22	ZZ	VV	DDU	
22	40	14	1	12 900	6 800	1 320	695	13.5	14 000	9 500	16 000	62/22	ZZ	VV	DDU	
	56	16	1.1	18 400	9 250	1 870	940	12.4	13 000	9 500	16 000	63/22	ZZ	VV	DDU	
	25	37	7	0.3	4 500	3 150	455	320	16.1	18 000	10 000	22 000	6805	ZZ	VV	DD
		42	9	0.3	7 050	4 550	715	460	15.4	16 000	10 000	19 000	6905	ZZ	VV	DDU
		47	8	0.3	8 850	5 600	905	570	15.1	15 000	—	18 000	16005	—	—	—
	47	12	0.6	10 100	5 850	1 030	595	14.5	15 000	9 500	18 000	6005	ZZ	VV	DDU	
	47	12	0.6	10 600	5 850	—	—	14.5	18 000	9 500	22 000	6005 [†]	ZZ	VV	DDU	
	52	15	1	14 000	7 850	1 430	800	13.9	13 000	9 000	15 000	6205	ZZ	VV	DDU	
	52	15	1.0	14 700	7 850	—	—	13.9	15 000	9 000	18 000	6205 [†]	ZZ	VV	DDU	
	62	17	1.1	20 600	11 200	2 100	1 150	13.2	11 000	8 000	13 000	6305	ZZ	VV	DDU	
62	17	1.1	21 600	11 200	—	—	13.2	13 000	8 000	16 000	6305 [†]	ZZ	VV	DDU		
28	52	12	0.6	12 500	7 400	1 270	755	14.5	14 000	8 500	16 000	60/28	ZZ	VV	DDU	
	58	16	1	16 600	9 500	1 700	970	13.9	12 000	8 000	14 000	62/28	ZZ	VV	DDU	
	68	18	1.1	26 700	14 000	2 730	1 430	12.4	10 000	7 500	13 000	63/28	ZZ	VV	DDU	
	30	42	7	0.3	4 700	3 650	480	370	16.4	15 000	9 000	18 000	6806	ZZ	VV	DD
		47	9	0.3	7 250	5 000	740	510	15.8	14 000	8 500	17 000	6906	ZZ	VV	DDU
		55	9	0.3	11 200	7 350	1 150	750	15.2	13 000	—	15 000	16006	—	—	—
	55	13	1	13 200	8 300	1 350	845	14.7	13 000	8 000	15 000	6006	ZZ	VV	DDU	
	55	13	1.0	13 900	8 300	—	—	14.7	15 000	8 000	18 000	6006 [†]	ZZ	VV	DDU	
	62	16	1	19 500	11 300	1 980	1 150	13.8	11 000	7 500	13 000	6206	ZZ	VV	DDU	
	62	16	1.0	20 400	11 300	—	—	13.8	12 000	7 500	15 000	6206 [†]	ZZ	VV	DDU	
72	19	1.1	26 700	15 000	2 720	1 530	13.3	9 500	6 700	12 000	6306	ZZ	VV	DDU		
72	19	1.1	28 000	15 000	—	—	13.3	11 000	6 700	13 000	6306 [†]	ZZ	VV	DDU		
32	58	13	1	15 100	9 150	1 530	935	14.5	12 000	7 500	14 000	60/32	ZZ	VV	DDU	
	65	17	1	20 700	11 600	2 120	1 190	13.6	10 000	7 100	12 000	62/32	ZZ	VV	DDU	
	75	20	1.1	29 900	17 000	3 050	1 730	13.2	9 000	6 300	11 000	63/32	ZZ	VV	DDU	

- Notes** (1) For tolerances for the snap ring grooves and snap ring dimensions, refer to Pages A52 to A55.
 (2) When heavy axial loads are applied, increase d_a and decrease D_a from the above values.

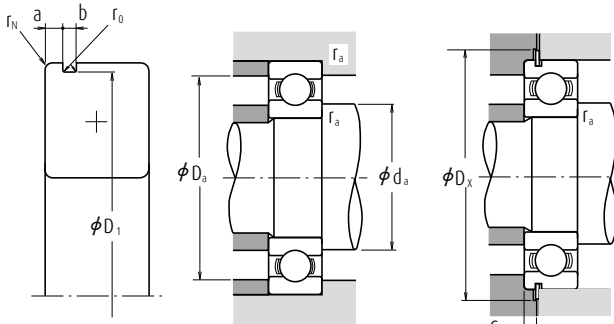

Dynamic Equivalent Load $P=XF_r+YF_a$

$\frac{f_r F_a}{C_{or}}$	e	$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.30
0.345	0.22	1	0	0.56	1.99
0.689	0.26	1	0	0.56	1.71
1.03	0.28	1	0	0.56	1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34	1	0	0.56	1.31
3.45	0.38	1	0	0.56	1.15
5.17	0.42	1	0	0.56	1.04
6.89	0.44	1	0	0.56	1.00

Static Equivalent Load

$$\frac{F_a}{F_r} > 0.8, P_0 = 0.6F_r + 0.5F_a$$


$$\frac{F_a}{F_r} \leq 0.8, P_0 = F_r$$

With Snap Ring Groove	With Snap Ring	Snap Ring Groove Dimensions (1) (mm)					Snap Ring (1) Dimensions (mm)		Abutment and Fillet Dimensions (mm)						Mass (kg) approx.
		a max.	b min.	D ₁ max.	r ₀ max.	r _N min.	D ₂ max.	f max.	d _r (2) min.	d _r (2) max.	D _a (2) max.	r _a max.	D _x min.	C _y max.	
N	NR	1.30	0.95	30.70	0.25	0.3	34.8	0.85	22	22	30	0.3	35.5	1.8	0.017
N	NR	1.70	0.95	35.70	0.25	0.3	39.8	0.85	22	24	35	0.3	40.5	2.3	0.037
—	—	—	—	—	—	—	—	—	22	—	40	0.3	—	—	0.048
N	NR	2.06	1.35	39.75	0.40	0.5	46.3	1.12	24	25.5	38	0.6	47	2.9	0.068
N	NR	2.06	1.35	39.75	0.40	0.5	46.3	1.12	24	25.5	38	0.6	47	2.9	0.068
N	NR	2.46	1.35	44.60	0.40	0.5	52.7	1.12	25	26.5	42	1	53.5	3.3	0.107
N	NR	2.46	1.35	44.60	0.40	0.5	52.7	1.12	25	26.5	42	1	53.5	3.3	0.107
N	NR	2.46	1.35	49.73	0.40	0.5	57.9	1.12	26.5	28	45.5	1	58.5	3.3	0.145
N	NR	2.46	1.35	49.73	0.40	0.5	57.9	1.12	26.5	28	45.5	1	58.5	3.3	0.145
N	NR	2.06	1.35	41.75	0.40	0.5	48.3	1.12	26	26.5	40	0.6	49	2.9	0.074
N	NR	2.46	1.35	47.60	0.40	0.5	55.7	1.12	27	29.5	45	1	56.5	3.3	0.119
N	NR	2.46	1.35	53.60	0.40	0.5	61.7	1.12	28.5	30.5	49.5	1	62.5	3.3	0.179
N	NR	1.30	0.95	35.70	0.25	0.3	39.8	0.85	27	27	35	0.3	40.5	1.8	0.021
N	NR	1.70	0.95	40.70	0.25	0.3	44.8	0.85	27	28.5	40	0.3	45.5	2.3	0.042
—	—	—	—	—	—	—	—	—	27	—	45	0.3	—	—	0.059
N	NR	2.06	1.35	44.60	0.40	0.5	52.7	1.12	29	30	43	0.6	53.5	2.9	0.079
N	NR	2.06	1.35	44.60	0.40	0.5	52.7	1.12	29	30	43	0.6	53.5	2.9	0.079
N	NR	2.46	1.35	49.73	0.40	0.5	57.9	1.12	30	32	47	1	58.5	3.3	0.129
N	NR	2.46	1.35	49.73	0.40	0.5	57.9	1.12	30	32	47	1	58.5	3.3	0.129
N	NR	3.28	1.90	59.61	0.60	0.5	67.7	1.70	31.5	36	55.5	1	68.5	4.6	0.235
N	NR	3.28	1.90	59.61	0.60	0.5	67.7	1.70	31.5	36	55.5	1	68.5	4.6	0.235
N	NR	2.06	1.35	49.73	0.40	0.5	57.9	1.12	32	34	48	0.6	58.5	2.9	0.096
N	NR	2.46	1.35	55.60	0.40	0.5	63.7	1.12	33	35.5	53	1	64.5	3.3	0.175
N	NR	3.28	1.90	64.82	0.60	0.5	74.6	1.70	34.5	38	61.5	1	76	4.6	0.287
N	NR	1.30	0.95	40.70	0.25	0.3	44.8	0.85	32	32	40	0.3	45.5	1.8	0.024
N	NR	1.70	0.95	45.70	0.25	0.3	49.8	0.85	32	34	45	0.3	50.5	2.3	0.052
—	—	—	—	—	—	—	—	—	32	—	53	0.3	—	—	0.087
N	NR	2.08	1.35	52.60	0.40	0.5	60.7	1.12	35	36.5	50	1	61.5	2.9	0.116
N	NR	2.08	1.35	52.60	0.40	0.5	60.7	1.12	35	36.5	50	1	61.5	2.9	0.116
N	NR	3.28	1.90	59.61	0.60	0.5	67.7	1.70	35	38.5	57	1	68.5	4.6	0.199
N	NR	3.28	1.90	59.61	0.60	0.5	67.7	1.70	35	38.5	57	1	68.5	4.6	0.199
N	NR	3.28	1.90	68.81	0.60	0.5	78.6	1.70	36.5	42.5	65.5	1	80	4.6	0.345
N	NR	3.28	1.90	68.81	0.60	0.5	78.6	1.70	36.5	42.5	65.5	1	80	4.6	0.345
N	NR	2.08	1.35	55.60	0.40	0.5	63.7	1.12	37	38.5	53	1	64.5	2.9	0.122
N	NR	3.28	1.90	62.60	0.60	0.5	70.7	1.70	37	40	60	1	71.5	4.6	0.225
N	NR	3.28	1.90	71.83	0.60	0.5	81.6	1.70	38.5	44.5	68.5	1	83	4.6	0.389

- Remarks**
1. Bearings marked with an asterisk (*) are NSKHPS bearings.
 2. Diameter Series 7 (extra thin section bearings) are also available, please contact NSK.
 3. When using bearings with rotating outer rings, contact NSK if they are sealed, shielded, or have snap rings.


Single-Row Deep Groove Ball Bearings

Bore Diameter 35 – 50 mm

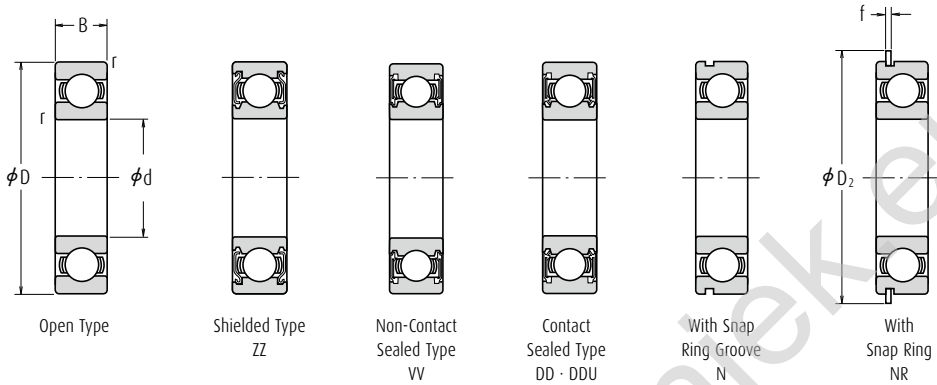

Boundary Dimensions (mm)				Basic Load Ratings (N) (kgf)				Factor f_0	Limiting Speeds (min ⁻¹)			Bearing Numbers				
d	D	B	r min.	C_r	C_{or}	C_r	C_{or}		Grease		Oil	Open	Shielded	Sealed		
								Open Z · ZZ · V · VV	DU DDU	Open Z						
35	47	7	0.3	4 900	4 100	500	420	16.7	14 000	7 500	16 000	6807	ZZ	VV	DD	
	55	10	0.6	10 600	7 250	1 080	740	15.5	12 000	7 500	15 000	6907	ZZ	VV	DDU	
	62	9	0.3	11 700	8 200	1 190	835	15.6	11 000	—	13 000	16007	—	—	—	
	62	14	1	16 000	10 300	1 630	1 050	14.8	11 000	6 700	13 000	6007	ZZ	VV	DDU	
	62	14	1.0	16 800	10 300	—	—	14.8	13 000	6 700	15 000	6007 ²	ZZ	VV	DDU	
	72	17	1.1	25 700	15 300	2 620	1 560	13.8	9 500	6 300	11 000	6207	ZZ	VV	DDU	
	72	17	1.1	27 000	15 300	—	—	13.8	11 000	6 300	13 000	6207 ²	ZZ	VV	DDU	
	80	21	1.5	33 500	19 200	3 400	1 960	13.2	8 500	6 000	10 000	6307	ZZ	VV	DDU	
	80	21	1.5	35 000	19 200	—	—	13.2	10 000	6 000	12 000	6307 ²	ZZ	VV	DDU	
	40	52	7	0.3	6 350	5 550	650	565	17.0	12 000	6 700	14 000	6808	ZZ	VV	DD
40	62	12	0.6	13 700	10 000	1 390	1 020	15.7	11 000	6 300	13 000	6908	ZZ	VV	DDU	
	68	9	0.3	12 600	9 650	1 290	985	16.0	10 000	—	12 000	16008	—	—	—	
	68	15	1	16 800	11 500	1 710	1 180	15.3	10 000	6 000	12 000	6008	ZZ	VV	DDU	
	68	15	1.0	17 600	11 500	—	—	15.3	12 000	6 000	14 000	6008 ²	ZZ	VV	DDU	
	80	18	1.1	29 100	17 900	2 970	1 820	14.0	8 500	5 600	10 000	6208	ZZ	VV	DDU	
	80	18	1.1	30 500	17 900	—	—	14.0	9 500	5 600	12 000	6208 ²	ZZ	VV	DDU	
	90	23	1.5	40 500	24 000	4 150	2 450	13.2	7 500	5 300	9 000	6308	ZZ	VV	DDU	
	90	23	1.5	43 000	24 000	—	—	13.2	9 000	5 300	11 000	6308 ²	ZZ	VV	DDU	
	45	58	7	0.3	6 600	6 150	670	625	17.2	11 000	6 000	13 000	6809	ZZ	VV	DD
	45	68	12	0.6	14 100	10 900	1 440	1 110	15.9	9 500	5 600	12 000	6909	ZZ	VV	DDU
75		10	0.6	14 900	11 400	1 520	1 160	15.9	9 000	—	11 000	16009	—	—	—	
75		16	1	20 900	15 200	2 140	1 550	15.3	9 000	5 300	11 000	6009	ZZ	VV	DDU	
75		16	1.0	22 000	15 200	—	—	15.3	10 000	5 300	12 000	6009 ²	ZZ	VV	DDU	
85		19	1.1	31 500	20 400	3 200	2 080	14.4	7 500	5 300	9 000	6209	ZZ	VV	DDU	
85		19	1.1	33 000	20 400	—	—	14.4	9 000	5 300	11 000	6209 ²	ZZ	VV	DDU	
100		25	1.5	53 000	32 000	5 400	3 250	13.1	6 700	4 800	8 000	6309	ZZ	VV	DDU	
100		25	1.5	55 500	32 000	—	—	13.1	8 000	4 800	9 500	6309 ²	ZZ	VV	DDU	
50		65	7	0.3	6 400	6 200	655	635	17.2	9 500	5 300	11 000	6810	ZZ	VV	DDU
50		72	12	0.6	14 500	11 700	1 480	1 200	16.1	9 000	5 300	11 000	6910	ZZ	VV	DDU
	80	10	0.6	15 400	12 400	1 570	1 260	16.1	8 500	—	10 000	16010	—	—	—	
	80	16	1	21 800	16 600	2 220	1 700	15.6	8 500	4 800	10 000	6010	ZZ	VV	DDU	
	80	16	1.0	22 900	16 600	—	—	15.6	9 500	4 800	11 000	6010 ²	ZZ	VV	DDU	
	90	20	1.1	35 000	23 200	3 600	2 370	14.4	7 100	4 800	8 500	6210	ZZ	VV	DDU	
	90	20	1.1	37 000	23 200	—	—	14.4	8 500	4 800	10 000	6210 ²	ZZ	VV	DDU	
	110	27	2	62 000	38 500	6 300	3 900	13.2	6 000	4 300	7 500	6310	ZZ	VV	DDU	
	110	27	2.0	65 000	38 500	—	—	13.2	7 100	4 300	8 500	6310 ²	ZZ	VV	DDU	

Notes (1) For tolerances for the snap ring grooves and snap ring dimensions, refer to Pages A52 to A55.
 (2) When heavy axial loads are applied, increase d_3 and decrease D_3 from the above values.

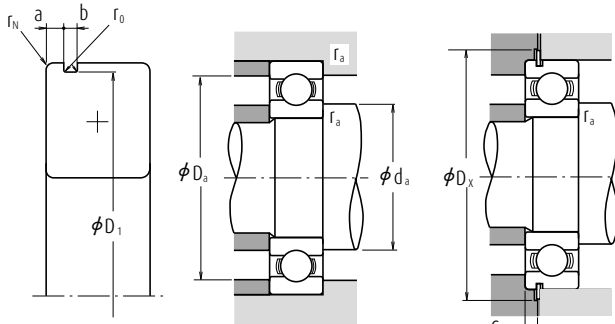

Dynamic Equivalent Load $P=XF_r+YF_a$

$\frac{f_a F_a}{C_{or}}$	e	$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.30
0.345	0.22	1	0	0.56	1.99
0.689	0.26	1	0	0.56	1.71
1.03	0.28	1	0	0.56	1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34	1	0	0.56	1.31
3.45	0.38	1	0	0.56	1.15
5.17	0.42	1	0	0.56	1.04
6.89	0.44	1	0	0.56	1.00

Static Equivalent Load

$$\frac{F_a}{F_r} > 0.8, P_0 = 0.6F_r + 0.5F_a$$


$$\frac{F_a}{F_r} \leq 0.8, P_0 = F_r$$

With Snap Ring Groove	With Snap Ring	Snap Ring Groove Dimensions (1) (mm)					Snap Ring (1) Dimensions (mm)		Abutment and Fillet Dimensions (mm)					Mass (kg) approx.	
		a max.	b min.	D ₁ max.	r ₀ max.	r _N min.	D ₂ max.	f max.	d _r (2) min.	d _r (2) max.	D _a (2) max.	r _a max.	D _x min.		C _y max.
N	NR	1.30	0.95	45.70	0.25	0.3	49.8	0.85	37	37	45	0.3	50.5	1.8	0.027
N	NR	1.70	0.95	53.70	0.25	0.5	57.8	0.85	39	39	51	0.6	58.5	2.3	0.075
—	—	—	—	—	—	—	—	—	37	—	60	0.3	—	—	0.107
N	NR	2.08	1.90	59.61	0.60	0.5	67.7	1.70	40	41.5	57	1	68.5	3.4	0.151
N	NR	2.08	1.90	59.61	0.60	0.5	67.7	1.70	40	41.5	57	1	68.5	3.4	0.151
N	NR	3.28	1.90	68.81	0.60	0.5	78.6	1.70	41.5	44.5	65.5	1	80	4.6	0.284
N	NR	3.28	1.90	68.81	0.60	0.5	78.6	1.70	41.5	44.5	65.5	1	80	4.6	0.284
N	NR	3.28	1.90	76.81	0.60	0.5	86.6	1.70	43	47	72	1.5	88	4.6	0.464
N	NR	3.28	1.90	76.81	0.60	0.5	86.6	1.70	43	47	72	1.5	88	4.6	0.464
N	NR	1.30	0.95	50.70	0.25	0.3	54.8	0.85	42	42	50	0.3	55.5	1.8	0.031
N	NR	1.70	0.95	60.70	0.25	0.5	64.8	0.85	44	46	58	0.6	65.5	2.3	0.112
—	—	—	—	—	—	—	—	—	42	—	66	0.3	—	—	0.13
N	NR	2.49	1.90	64.82	0.60	0.5	74.6	1.70	45	47.5	63	1	76	3.8	0.19
N	NR	2.49	1.90	64.82	0.60	0.5	74.6	1.70	45	47.5	63	1	76	3.8	0.19
N	NR	3.28	1.90	76.81	0.60	0.5	86.6	1.70	46.5	50.5	73.5	1	88	4.6	0.366
N	NR	3.28	1.90	76.81	0.60	0.5	86.6	1.70	46.5	50.5	73.5	1	88	4.6	0.366
N	NR	3.28	2.70	86.79	0.60	0.5	96.5	2.46	48	53	82	1.5	98	5.4	0.636
N	NR	3.28	2.70	86.79	0.60	0.5	96.5	2.46	48	53	82	1.5	98	5.4	0.636
N	NR	1.30	0.95	56.70	0.25	0.3	60.8	0.85	47	47.5	56	0.3	61.5	1.8	0.038
N	NR	1.70	0.95	66.70	0.25	0.5	70.8	0.85	49	50	64	0.6	72	2.3	0.126
—	—	—	—	—	—	—	—	—	49	—	71	0.6	—	—	0.167
N	NR	2.49	1.90	71.83	0.60	0.5	81.6	1.70	50	53.5	70	1	83	3.8	0.241
N	NR	2.49	1.90	71.83	0.60	0.5	81.6	1.70	50	53.5	70	1	83	3.8	0.241
N	NR	3.28	1.90	81.81	0.60	0.5	91.6	1.70	51.5	55.5	78.5	1	93	4.6	0.42
N	NR	3.28	1.90	81.81	0.60	0.5	91.6	1.70	51.5	55.5	78.5	1	93	4.6	0.42
N	NR	3.28	2.70	96.80	0.60	0.5	106.50	2.46	53	61.5	92	1.5	108	5.4	0.829
N	NR	3.28	2.70	96.80	0.60	0.5	106.50	2.46	53	61.5	92	1.5	108	5.4	0.829
N	NR	1.30	0.95	63.7	0.25	0.3	67.8	0.85	52	52.5	63	0.3	68.5	1.8	0.050
N	NR	1.70	0.95	70.7	0.25	0.5	74.8	0.85	54	55	68	0.6	76	2.3	0.135
—	—	—	—	—	—	—	—	—	54	—	76	0.6	—	—	0.175
N	NR	2.49	1.90	76.81	0.60	0.5	86.6	1.70	55	58.5	75	1	88	3.8	0.261
N	NR	2.49	1.90	76.81	0.60	0.5	86.6	1.70	55	58.5	75	1	88	3.8	0.261
N	NR	3.28	2.70	86.79	0.60	0.5	96.5	2.46	56.5	60	83.5	1	98	5.4	0.459
N	NR	3.28	2.70	86.79	0.60	0.5	96.5	2.46	56.5	60	83.5	1	98	5.4	0.459
N	NR	3.28	2.70	106.81	0.60	0.5	116.6	2.46	59	68	101	2	118	5.4	1.06
N	NR	3.28	2.70	106.81	0.60	0.5	116.6	2.46	59	68	101	2	118	5.4	1.06

- Remarks**
1. Bearings marked with an asterisk (*) are **NSKHPS** bearings.
 2. Diameter Series 7 (extra thin section bearings) are also available, please contact NSK.
 3. When using bearings with rotating outer rings, contact NSK if they are sealed, shielded, or have snap rings.


Single-Row Deep Groove Ball Bearings

Bore Diameter 55 – 70 mm

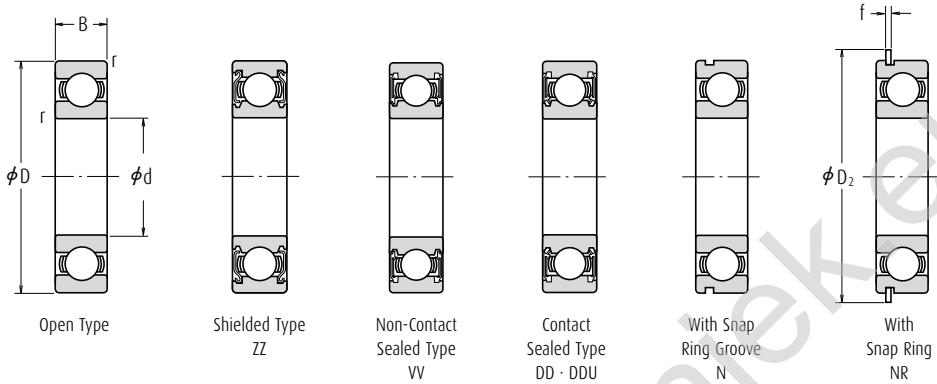

Boundary Dimensions (mm)				Basic Load Ratings (N) (kgf)				Factor f_0	Limiting Speeds (min ⁻¹)			Bearing Numbers			
d	D	B	r min.	C_r	C_{or}	C_r	C_{or}		Grease Open Z · ZZ V · VV	Oil DU DDU	Oil Open Z	Open	Shielded	Sealed	
55	72	9	0.3	8 800	8 500	900	865	17.0	8 500	4 800	10 000	6811	ZZ	VV	DDU
	80	13	1	16 000	13 300	1 630	1 350	16.2	8 000	4 500	9 500	6911	ZZ	VV	DDU
	90	11	0.6	19 400	16 300	1 980	1 660	16.2	7 500	—	9 000	16011	—	—	—
	90	18	1.1	28 300	21 200	2 880	2 170	15.3	7 500	4 500	9 000	6011	ZZ	VV	DDU
	90	18	1.1	29 700	21 200	—	—	15.3	8 500	4 500	10 000	6011 ⁽¹⁾	ZZ	VV	DDU
	100	21	1.5	43 500	29 300	4 450	2 980	14.3	6 300	4 300	7 500	6211	ZZ	VV	DDU
	100	21	1.5	45 500	29 300	—	—	14.3	7 500	4 300	9 000	6211 ⁽¹⁾	ZZ	VV	DDU
	120	29	2	71 500	44 500	7 300	4 550	13.1	5 600	4 000	6 700	6311	ZZ	VV	DDU
	120	29	2.0	75 000	44 500	—	—	13.1	6 700	4 000	8 000	6311 ⁽¹⁾	ZZ	VV	DDU
	60	78	10	0.3	11 500	10 900	1 170	1 120	16.9	8 000	4 500	9 500	6812	ZZ	VV
85	13	1	19 400	16 300	1 980	1 660	16.2	7 500	4 300	9 000	6912	ZZ	VV	DDU	
95	11	0.6	20 000	17 500	2 040	1 780	16.3	7 100	—	8 500	16012	—	—	—	
95	18	1.1	29 500	23 200	3 000	2 370	15.6	7 100	4 000	8 500	6012	ZZ	VV	DDU	
95	18	1.1	31 000	23 200	—	—	15.6	8 000	4 000	9 500	6012 ⁽¹⁾	ZZ	VV	DDU	
110	22	1.5	52 500	36 000	5 350	3 700	14.3	5 600	3 800	7 100	6212	ZZ	VV	DDU	
110	22	1.5	55 000	36 000	—	—	14.3	6 700	3 800	8 000	6212 ⁽¹⁾	ZZ	VV	DDU	
130	31	2.1	82 000	52 000	8 350	5 300	13.1	5 300	3 600	6 300	6312	ZZ	VV	DDU	
130	31	2.1	86 000	52 000	—	—	13.1	6 000	3 600	7 100	6312 ⁽¹⁾	ZZ	VV	DDU	
65	85	10	0.6	11 900	12 100	1 220	1 230	17.0	7 500	4 000	8 500	6813	ZZ	VV	DD
90	13	1	17 400	16 100	1 770	1 640	16.6	7 100	4 000	8 500	6913	ZZ	VV	DDU	
100	11	0.6	20 500	18 700	2 090	1 910	16.5	6 700	—	8 000	16013	—	—	—	
100	18	1.1	30 500	25 200	3 100	2 570	15.8	6 700	4 000	8 000	6013	ZZ	VV	DDU	
100	18	1.1	32 000	25 200	—	—	15.8	7 500	4 000	9 000	6013 ⁽¹⁾	ZZ	VV	DDU	
120	23	1.5	57 500	40 000	5 850	4 100	14.4	5 300	3 600	6 300	6213	ZZ	VV	DDU	
120	23	1.5	60 000	40 000	—	—	14.4	6 300	3 600	7 500	6213 ⁽¹⁾	ZZ	VV	DDU	
140	33	2.1	92 500	60 000	9 450	6 100	13.2	4 800	3 400	6 000	6313	ZZ	VV	DDU	
140	33	2.1	97 500	60 000	—	—	13.2	5 600	3 400	6 700	6313 ⁽¹⁾	ZZ	VV	DDU	
70	90	10	0.6	12 100	12 700	1 230	1 300	17.2	6 700	3 800	8 000	6814	ZZ	VV	DD
100	16	1	23 700	21 200	2 420	2 160	16.3	6 300	3 600	7 500	6914	ZZ	VV	DDU	
110	13	0.6	26 800	23 600	2 730	2 410	16.3	6 000	—	7 100	16014	—	—	—	
110	20	1.1	38 000	31 000	3 900	3 150	15.6	6 000	3 600	7 100	6014	ZZ	VV	DDU	
110	20	1.1	40 000	31 000	—	—	15.6	7 100	3 600	8 500	6014 ⁽¹⁾	ZZ	VV	DDU	
125	24	1.5	62 000	44 000	6 350	4 500	14.5	5 000	3 400	6 300	6214	ZZ	VV	DDU	
125	24	1.5	65 500	44 000	—	—	14.5	6 000	3 400	7 100	6214 ⁽¹⁾	ZZ	VV	DDU	
150	35	2.1	104 000	68 000	10 600	6 950	13.2	4 500	3 200	5 300	6314	ZZ	VV	DDU	
150	35	2.1	109 000	68 000	—	—	13.2	5 300	3 200	6 300	6314 ⁽¹⁾	ZZ	VV	DDU	

- Notes** (1) For tolerances for the snap ring grooves and snap ring dimensions, refer to Pages A52 to A55.
 (2) When heavy axial loads are applied, increase d_3 and decrease D_3 from the above values.

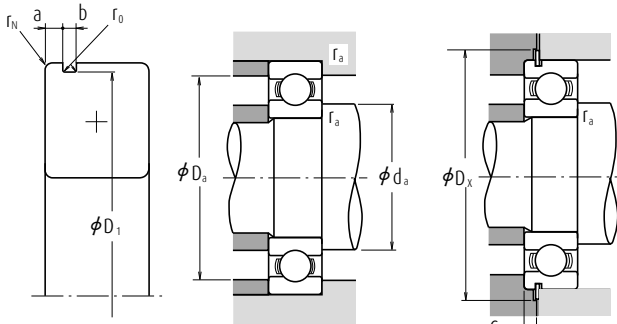

Dynamic Equivalent Load $P=XF_r+YF_a$

$\frac{f_a F_a}{C_{or}}$	e	$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.30
0.345	0.22	1	0	0.56	1.99
0.689	0.26	1	0	0.56	1.71
1.03	0.28	1	0	0.56	1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34	1	0	0.56	1.31
3.45	0.38	1	0	0.56	1.15
5.17	0.42	1	0	0.56	1.04
6.89	0.44	1	0	0.56	1.00

Static Equivalent Load

$$\frac{F_a}{F_r} > 0.8, P_0 = 0.6F_r + 0.5F_a$$


$$\frac{F_a}{F_r} \leq 0.8, P_0 = F_r$$

With Snap Ring Groove	With Snap Ring	Snap Ring Groove Dimensions (1) (mm)					Snap Ring (1) Dimensions (mm)		Abutment and Fillet Dimensions (mm)					Mass (kg) approx.	
		a max.	b min.	D ₁ max.	r ₀ max.	r _N min.	D ₂ max.	f max.	d _r (2) min.	d _r (2) max.	D _a (2) max.	r _a max.	D _x min.		C _y max.
N	NR	1.70	0.95	70.7	0.25	0.3	74.8	0.85	57	59	70	0.3	76	2.3	0.081
N	NR	2.10	1.30	77.9	0.40	0.5	84.4	1.12	60	61.5	75	1	86	2.9	0.189
—	—	—	—	—	—	—	—	—	59	—	86	0.6	—	—	0.257
N	NR	2.87	2.70	86.79	0.60	0.5	96.5	2.46	61.5	64	83.5	1	98	5.0	0.381
N	NR	2.87	2.70	86.79	0.60	0.5	96.5	2.46	61.5	64	83.5	1	98	5.0	0.381
N	NR	3.28	2.70	96.8	0.60	0.5	106.5	2.46	63	66.5	92	1.5	108	5.4	0.619
N	NR	3.28	2.70	96.8	0.60	0.5	106.5	2.46	63	66.5	92	1.5	108	5.4	0.619
N	NR	4.06	3.10	115.21	0.60	0.5	129.7	2.82	64	72.5	111	2	131.5	6.5	1.37
N	NR	4.06	3.10	115.21	0.60	0.5	129.7	2.82	64	72.5	111	2	131.5	6.5	1.37
N	NR	1.70	1.30	76.2	0.40	0.3	82.7	1.12	62	64	76	0.3	84	2.5	0.103
N	NR	2.10	1.30	82.9	0.40	0.5	89.4	1.12	65	66	80	1	91	2.9	0.192
—	—	—	—	—	—	—	—	—	64	—	91	0.6	—	—	0.281
N	NR	2.87	2.70	91.82	0.60	0.5	101.6	2.46	66.5	69	88.5	1	103	5.0	0.412
N	NR	2.87	2.70	91.82	0.60	0.5	101.6	2.46	66.5	69	88.5	1	103	5.0	0.412
N	NR	3.28	2.70	106.81	0.60	0.5	116.6	2.46	68	74.5	102	1.5	118	5.4	0.783
N	NR	3.28	2.70	106.81	0.60	0.5	116.6	2.46	68	74.5	102	1.5	118	5.4	0.783
N	NR	4.06	3.10	125.22	0.60	0.5	139.7	2.82	71	79	119	2	141.5	6.5	1.72
N	NR	4.06	3.10	125.22	0.60	0.5	139.7	2.82	71	79	119	2	141.5	6.5	1.72
N	NR	1.70	1.30	82.9	0.40	0.5	89.4	1.12	69	69	81	0.6	91	2.5	0.128
N	NR	2.10	1.30	87.9	0.40	0.5	94.4	1.12	70	71.5	85	1	96	2.9	0.218
—	—	—	—	—	—	—	—	—	69	—	96	0.6	—	—	0.30
N	NR	2.87	2.70	96.8	0.60	0.5	106.5	2.46	71.5	73	93.5	1	108	5.0	0.439
N	NR	2.87	2.70	96.8	0.60	0.5	106.5	2.46	71.5	73	93.5	1	108	5.0	0.439
N	NR	4.06	3.10	115.21	0.60	0.5	129.7	2.82	73	80	112	1.5	131.5	6.5	1.0
N	NR	4.06	3.10	115.21	0.60	0.5	129.7	2.82	73	80	112	1.5	131.5	6.5	1.0
N	NR	4.90	3.10	135.23	0.60	0.5	149.7	2.82	76	85.5	129	2	152	7.3	2.11
N	NR	4.90	3.10	135.23	0.60	0.5	149.7	2.82	76	85.5	129	2	152	7.3	2.11
N	NR	1.70	1.30	87.9	0.40	0.5	94.4	1.12	74	74.5	86	0.6	96	2.5	0.134
N	NR	2.50	1.30	97.9	0.40	0.5	104.4	1.12	75	77.5	95	1	106	3.3	0.349
—	—	—	—	—	—	—	—	—	74	—	106	0.6	—	—	0.441
N	NR	2.87	2.70	106.81	0.60	0.5	116.6	2.46	76.5	80.5	103.5	1	118	5.0	0.608
N	NR	2.87	2.70	106.81	0.60	0.5	116.6	2.46	76.5	80.5	103.5	1	118	5.0	0.608
N	NR	4.06	3.10	120.22	0.60	0.5	134.7	2.82	78	84	117	1.5	136.5	6.5	1.09
N	NR	4.06	3.10	120.22	0.60	0.5	134.7	2.82	78	84	117	1.5	136.5	6.5	1.09
N	NR	4.90	3.10	145.24	0.60	0.5	159.7	2.82	81	92	139	2	162	7.3	2.57
N	NR	4.90	3.10	145.24	0.60	0.5	159.7	2.82	81	92	139	2	162	7.3	2.57

- Remarks**
1. Bearings marked with an asterisk (*) are **NSKHPS** bearings.
 2. Diameter Series 7 (extra thin section bearings) are also available, please contact NSK.
 3. When using bearings with rotating outer rings, contact NSK if they are sealed, shielded, or have snap rings.


Single-Row Deep Groove Ball Bearings

Bore Diameter 75 – 90 mm

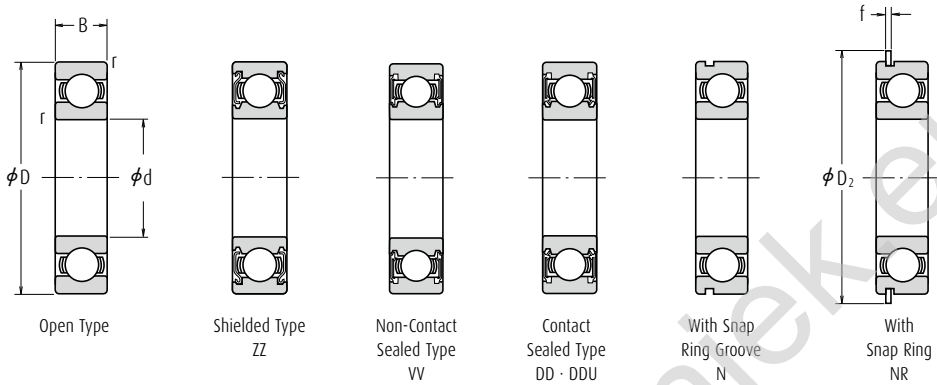

Boundary Dimensions (mm)				Basic Load Ratings (N) (kgf)				Factor f_0	Limiting Speeds (min ⁻¹)			Bearing Numbers			
d	D	B	r min.	C_r	C_{or}	C_r	C_{or}		Grease Open Z · ZZ V · VV	Oil DU DDU	Open Z	Open	Shielded	Sealed	
75	95	10	0.6	12 500	13 900	1 280	1 410	17.3	6 300	3 600	7 500	6815	ZZ	VV DDU	
	105	16	1	24 400	22 600	2 480	2 300	16.5	6 000	3 400	7 100	6915	ZZ	VV DDU	
	115	13	0.6	27 600	25 300	2 820	2 580	16.4	5 600	—	6 700	16015	—	—	
	115	20	1.1	39 500	33 500	4 050	3 400	15.8	5 600	3 400	6 700	6015	ZZ	VV DDU	
	115	20	1.1	41 500	33 500	—	—	15.8	6 700	3 400	8 000	6015 ⁽¹⁾	ZZ	VV DDU	
	130	25	1.5	66 000	49 500	6 750	5 050	14.7	4 800	3 200	5 600	6215	ZZ	VV DDU	
	130	25	1.5	69 500	49 500	—	—	14.7	5 600	3 200	6 700	6215 ⁽²⁾	ZZ	VV DDU	
	160	37	2.1	113 000	77 000	11 600	7 850	13.2	4 300	2 800	5 000	6315	ZZ	VV DDU	
	160	37	2.1	119 000	77 000	—	—	13.2	5 000	2 800	6 000	6315 ⁽¹⁾	ZZ	VV DDU	
	80	100	10	0.6	12 700	14 500	1 290	1 470	17.4	6 000	3 400	7 100	6816	ZZ	VV DDU
110	16	1	25 000	24 000	2 540	2 450	16.6	5 600	3 200	6 700	6916	ZZ	VV DDU		
	125	14	0.6	32 000	29 600	3 250	3 000	16.4	5 300	—	6 300	16016	—	—	
	125	22	1.1	47 500	40 000	4 850	4 050	15.6	5 300	3 200	6 300	6016	ZZ	VV DDU	
	125	22	1.1	50 000	40 000	—	—	15.6	6 000	3 200	7 500	6016 ⁽¹⁾	ZZ	VV DDU	
	140	26	2	72 500	53 000	7 400	5 400	14.6	4 500	3 000	5 300	6216	ZZ	VV DDU	
	140	26	2.0	76 500	53 000	—	—	14.6	5 300	3 000	6 300	6216 ⁽²⁾	ZZ	VV DDU	
	170	39	2.1	123 000	86 500	12 500	8 850	13.3	4 000	2 800	4 800	6316	ZZ	VV DDU	
	170	39	2.1	129 000	86 500	—	—	13.3	4 500	2 800	5 600	6316 ⁽¹⁾	ZZ	VV DDU	
	85	110	13	1	18 700	20 000	1 910	2 040	17.1	5 600	3 200	6 700	6817	ZZ	VV DDU
	120	18	1.1	32 000	29 600	3 250	3 000	16.4	5 300	3 000	6 300	6917	ZZ	VV DDU	
130		14	0.6	33 000	31 500	3 350	3 200	16.5	5 000	—	6 000	16017	—	—	
130		22	1.1	49 500	43 000	5 050	4 400	15.8	5 000	3 000	6 000	6017	ZZ	VV DDU	
130		22	1.1	52 000	43 000	—	—	15.8	6 000	3 000	7 100	6017 ⁽¹⁾	ZZ	VV DDU	
150		28	2	84 000	62 000	8 550	6 300	14.5	4 300	2 800	5 000	6217	ZZ	VV DDU	
150		28	2.0	88 000	62 000	—	—	14.5	5 000	2 800	6 000	6217 ⁽²⁾	ZZ	VV DDU	
180		41	3	133 000	97 000	13 500	9 850	13.3	3 800	2 600	4 500	6317	ZZ	VV DDU	
180		41	3.0	139 000	97 000	—	—	13.3	4 300	2 600	5 000	6317 ⁽¹⁾	ZZ	VV DDU	
90		115	13	1	19 000	21 000	1 940	2 140	17.2	5 300	3 000	6 300	6818	ZZ	VV DDU
125		18	1.1	33 000	31 500	3 350	3 200	16.5	5 000	2 800	6 000	6918	ZZ	VV DDU	
	140	16	1	41 500	39 500	4 250	4 000	16.3	4 800	—	5 600	16018	—	—	
	140	24	1.5	58 000	50 000	5 950	5 050	15.6	4 800	2 800	5 600	6018	ZZ	VV DDU	
	140	24	1.5	61 000	50 000	—	—	15.6	5 300	2 800	6 300	6018 ⁽¹⁾	ZZ	VV DDU	
	160	30	2	96 000	71 500	9 800	7 300	14.5	4 000	2 600	4 800	6218	ZZ	VV DDU	
	160	30	2.0	101 000	71 500	—	—	14.5	4 500	2 600	5 600	6218 ⁽²⁾	ZZ	VV DDU	
	190	43	3	143 000	107 000	14 500	11 000	13.3	3 600	2 400	4 300	6318	ZZ	VV DDU	
	190	43	3.0	150 000	107 000	—	—	13.3	4 000	2 400	4 800	6318 ⁽¹⁾	ZZ	VV DDU	

- Notes (1) For tolerances for the snap ring grooves and snap ring dimensions, refer to Pages A52 to A55.
 (2) When heavy axial loads are applied, increase d_a and decrease D_a from the above values.

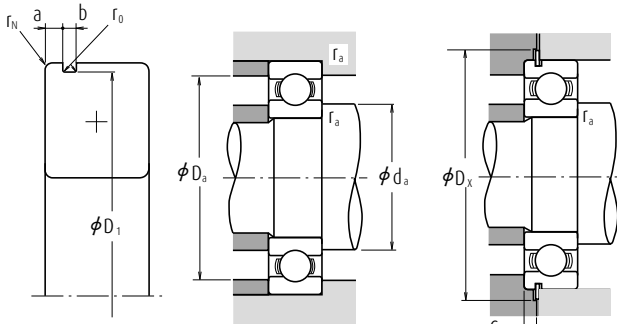

Dynamic Equivalent Load $P=XF_r+YF_a$

$\frac{f_a F_a}{C_{or}}$	e	$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.30
0.345	0.22	1	0	0.56	1.99
0.689	0.26	1	0	0.56	1.71
1.03	0.28	1	0	0.56	1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34	1	0	0.56	1.31
3.45	0.38	1	0	0.56	1.15
5.17	0.42	1	0	0.56	1.04
6.89	0.44	1	0	0.56	1.00

Static Equivalent Load

$$\frac{F_a}{F_r} > 0.8, P_0 = 0.6F_r + 0.5F_a$$

$$\frac{F_a}{F_r} \leq 0.8, P_0 = F_r$$


With Snap Ring Groove	With Snap Ring	Snap Ring Groove Dimensions (1) (mm)					Snap Ring (1) Dimensions (mm)		Abutment and Fillet Dimensions (mm)					Mass (kg) approx.	
		a max.	b min.	D ₁ max.	r ₀ max.	r _N min.	D ₂ max.	f max.	d _r (2) min.	d _r (2) max.	D _a (2) max.	r _a max.	D _x min.		C _y max.
N	NR	1.70	1.30	92.9	0.40	0.5	99.4	1.12	79	79.5	91	0.6	101	2.5	0.149
N	NR	2.50	1.30	102.60	0.40	0.5	110.7	1.12	80	82	100	1	112	3.3	0.364
—	—	—	—	—	—	—	—	—	79	—	111	0.6	—	—	0.463
N	NR	2.87	2.70	111.81	0.60	0.5	121.6	2.46	81.5	85.5	108.5	1	123	5.0	0.649
N	NR	2.87	2.70	111.81	0.60	0.5	121.6	2.46	81.5	85.5	108.5	1	123	5.0	0.649
N	NR	4.06	3.10	125.22	0.60	0.5	139.7	2.82	83	90	122	1.5	141.5	6.5	1.19
N	NR	4.06	3.10	125.22	0.60	0.5	139.7	2.82	83	90	122	1.5	141.5	6.5	1.19
N	NR	4.90	3.10	155.22	0.60	0.5	169.7	2.82	86	98.5	149	2	172	7.3	3.08
N	NR	4.90	3.10	155.22	0.60	0.5	169.7	2.82	86	98.5	149	2	172	7.3	3.08
N	NR	1.70	1.3	97.9	0.4	0.5	104.4	1.12	84	84.5	96	0.6	106	2.5	0.151
N	NR	2.50	1.3	107.60	0.4	0.5	115.7	1.12	85	87.5	105	1	117	3.3	0.391
—	—	—	—	—	—	—	—	—	84	—	121	0.6	—	—	0.621
N	NR	2.87	3.1	120.22	0.6	0.5	134.7	2.82	86.5	91	118.5	1	136.5	5.3	0.872
N	NR	2.87	3.1	120.22	0.6	0.5	134.7	2.82	86.5	91	118.5	1	136.5	5.3	0.872
N	NR	4.90	3.1	135.23	0.6	0.5	149.7	2.82	89	95.5	131	2	152	7.3	1.42
N	NR	4.90	3.1	135.23	0.6	0.5	149.7	2.82	89	95.5	131	2	152	7.3	1.42
N	NR	5.69	3.5	163.65	0.6	0.5	182.9	3.10	91	104.5	159	2	185	8.4	3.67
N	NR	5.69	3.5	163.65	0.6	0.5	182.9	3.10	91	104.5	159	2	185	8.4	3.67
N	NR	2.10	1.3	107.60	0.4	0.5	115.7	1.12	90	90.5	105	1	117	2.9	0.263
N	NR	3.30	1.3	117.60	0.4	0.5	125.7	1.12	91.5	94.5	113.5	1	127	4.1	0.55
—	—	—	—	—	—	—	—	—	89	—	126	0.6	—	—	0.652
N	NR	2.87	3.1	125.22	0.6	0.5	139.7	2.82	91.5	96	123.5	1	141.5	5.3	0.918
N	NR	2.87	3.1	125.22	0.6	0.5	139.7	2.82	91.5	96	123.5	1	141.5	5.3	0.918
N	NR	4.90	3.1	145.24	0.6	0.5	159.7	2.82	94	102	141	2	162	7.3	1.76
N	NR	4.90	3.1	145.24	0.6	0.5	159.7	2.82	94	102	141	2	162	7.3	1.76
N	NR	5.69	3.5	173.66	0.6	0.5	192.9	3.10	98	110.5	167	2.5	195	8.4	4.28
N	NR	5.69	3.5	173.66	0.6	0.5	192.9	3.10	98	110.5	167	2.5	195	8.4	4.28
N	NR	2.10	1.3	112.60	0.4	0.5	120.7	1.12	95	95.5	110	1	122	2.9	0.276
N	NR	3.30	1.3	122.60	0.4	0.5	130.7	1.12	96.5	98.5	118.5	1	132	4.1	0.585
—	—	—	—	—	—	—	—	—	95	—	135	1	—	—	0.873
N	NR	3.71	3.1	135.23	0.6	0.5	149.7	2.82	98	103	132	1.5	152	6.1	1.19
N	NR	3.71	3.1	135.23	0.6	0.5	149.7	2.82	98	103	132	1.5	152	6.1	1.19
N	NR	4.90	3.1	155.22	0.6	0.5	169.7	2.82	99	107.5	151	2	172	7.3	2.18
N	NR	4.90	3.1	155.22	0.6	0.5	169.7	2.82	99	107.5	151	2	172	7.3	2.18
N	NR	5.69	3.5	183.64	0.6	0.5	202.9	3.10	103	117	177	2.5	205	8.4	4.98
N	NR	5.69	3.5	183.64	0.6	0.5	202.9	3.10	103	117	177	2.5	205	8.4	4.98

Remarks


1. Bearings marked with an asterisk (*) are NSKPS bearings.
2. When using bearings with rotating outer rings, contact NSK if they are sealed, shielded, or have snap rings.

Single-Row Deep Groove Ball Bearings

Bore Diameter 95 - 110 mm

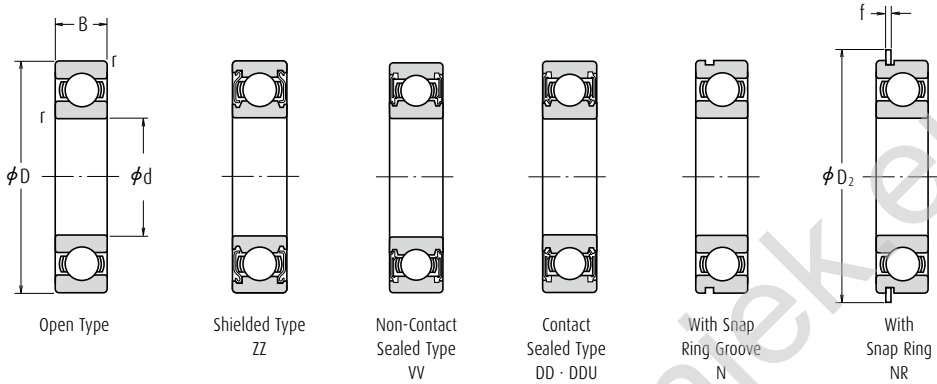

Boundary Dimensions (mm)				Basic Load Ratings (N) (kgf)				Factor f_0	Limiting Speeds (min ⁻¹)			Bearing Numbers			
d	D	B	r min.	C_r	C_{or}	C_r	C_{or}		Grease Open Z · ZZ V · VV	Oil DU DDU	Open Z	Open	Shielded	Sealed	
95	120	13	1	19 300	22 000	1 970	2 240	17.2	5 000	2 800	6 000	6819	ZZ	VV DD	
	130	18	1.1	33 500	33 500	3 450	3 400	16.6	4 800	2 800	5 600	6919	ZZ	VV DDU	
	145	16	1	43 000	42 000	4 350	4 250	16.4	4 500	—	5 300	16019	—	—	
	145	24	1.5	60 500	54 000	6 150	5 500	15.8	4 500	2 600	5 300	6019	ZZ	VV DDU	
	145	24	1.5	63 500	54 000	—	—	15.8	5 000	2 600	6 000	6019 ⁺	ZZ	VV DDU	
	170	32	2.1	109 000	82 000	11 100	8 350	14.4	3 800	2 600	4 500	6219	ZZ	VV DDU	
	170	32	2.1	114 000	82 000	—	—	14.4	4 300	2 600	5 000	6219 ⁺	ZZ	VV DDU	
	200	45	3	153 000	119 000	15 600	12 100	13.3	3 000	2 400	3 600	6319	ZZ	VV DDU	
	200	45	3.0	160 000	119 000	—	—	13.3	3 400	2 400	4 300	6319 ⁺	ZZ	VV DDU	
	100	125	13	1	19 600	23 000	2 000	2 340	17.3	4 800	2 800	5 600	6820	ZZ	VV DD
140		20	1.1	43 000	42 000	4 350	4 250	16.4	4 500	2 600	5 300	6920	ZZ	VV DDU	
150		16	1	42 500	42 000	4 300	4 300	16.5	4 300	—	5 300	16020	—	—	
150		24	1.5	60 000	54 000	6 150	5 550	15.9	4 300	2 600	5 300	6020	ZZ	VV DDU	
150		24	1.5	63 000	54 000	—	—	15.9	5 000	2 600	6 000	6020 ⁺	ZZ	VV DDU	
180		34	2.1	122 000	93 000	12 500	9 500	14.4	3 600	2 400	4 300	6220	ZZ	VV DDU	
180		34	2.1	128 000	93 000	—	—	14.4	4 000	2 400	4 800	6220 ⁺	ZZ	VV DDU	
215		47	3	173 000	141 000	17 700	14 400	13.2	2 800	2 200	3 400	6320	ZZ	VV DDU	
105		130	13	1	19 800	23 900	2 020	2 440	17.4	4 800	2 600	5 600	6821	ZZ	VV DDU
		145	20	1.1	42 500	42 000	4 300	4 300	16.5	4 300	—	5 300	6921	ZZ	VV —
	160	18	1	52 000	50 500	5 300	5 150	16.3	4 000	—	4 800	16021	—	—	
	160	26	2	72 500	66 000	7 400	6 700	15.8	4 000	2 400	4 800	6021	ZZ	VV DDU	
	160	26	2.0	76 000	66 000	—	—	15.8	4 500	2 400	5 600	6021 ⁺	ZZ	VV DDU	
	190	36	2.1	133 000	105 000	13 600	10 700	14.4	3 400	2 200	4 000	6221	ZZ	VV DDU	
110	130	13	1	140 000	105 000	—	—	14.4	3 800	2 200	4 500	6221 ⁺	ZZ	VV DDU	
	225	49	3	184 000	154 000	18 700	15 700	13.2	2 600	2 000	3 200	6321	ZZ	— DDU	
	140	16	1	28 100	32 500	2 860	3 350	17.1	4 300	2 400	5 300	6822	ZZ	VV DDU	
	150	20	1.1	43 500	44 500	4 450	4 550	16.6	4 300	2 400	5 000	6922	ZZ	VV DDU	
	170	19	1	57 500	56 500	5 850	5 800	16.3	3 800	—	4 500	16022	—	—	
	170	28	2	85 000	73 000	8 650	7 450	15.5	3 800	2 200	4 500	6022	ZZ	VV DDU	
	170	28	2.0	89 000	73 000	—	—	15.5	4 500	2 200	5 300	6022 ⁺	ZZ	VV DDU	
	200	38	2.1	144 000	117 000	14 700	11 900	14.3	2 800	2 200	3 400	6222	ZZ	VV DDU	
	240	50	3	205 000	179 000	20 900	18 300	13.2	2 400	—	3 000	6322	ZZ	— —	

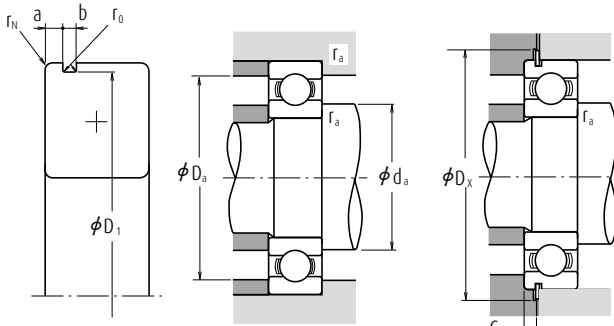

Dynamic Equivalent Load $P=XF_r+YF_a$

$\frac{f_a F_a}{C_{or}}$	e	$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.30
0.345	0.22	1	0	0.56	1.99
0.689	0.26	1	0	0.56	1.71
1.03	0.28	1	0	0.56	1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34	1	0	0.56	1.31
3.45	0.38	1	0	0.56	1.15
5.17	0.42	1	0	0.56	1.04
6.89	0.44	1	0	0.56	1.00

Static Equivalent Load

$$\frac{F_a}{F_r} > 0.8, P_0 = 0.6F_r + 0.5F_a$$


$$\frac{F_a}{F_r} \leq 0.8, P_0 = F_r$$

With Snap Ring Groove	With Snap Ring	Snap Ring Groove Dimensions (*) (mm)					Snap Ring (*) Dimensions (mm)		Abutment and Fillet Dimensions (mm)					Mass (kg) approx.	
		a max.	b min.	D ₁ max.	r ₀ max.	r _N min.	D ₂ max.	f max.	d _a (?) min.	d _a (?) max.	r _a max.	D _x min.	C _y max.		
N	NR	2.10	1.3	117.60	0.4	0.5	125.7	1.12	100	101.5	115	1	127	2.9	0.297
N	NR	3.30	1.3	127.60	0.4	0.5	135.7	1.12	101.5	103.5	123.5	1	137	4.1	0.601
—	—	—	—	—	—	—	—	—	100	—	140	1	—	—	0.904
N	NR	3.71	3.1	140.23	0.6	0.5	154.7	2.82	103	108.5	137	1.5	157	6.1	1.23
N	NR	3.71	3.1	140.23	0.6	0.5	154.7	2.82	103	108.5	137	1.5	157	6.1	1.23
N	NR	5.69	3.5	163.65	0.6	0.5	182.9	3.10	106	114	159	2	185	8.4	2.64
N	NR	5.69	3.5	163.65	0.6	0.5	182.9	3.10	106	114	159	2	185	8.4	2.64
N	NR	5.69	3.5	193.65	0.6	0.5	212.9	3.10	108	123.5	187	2.5	215	8.4	5.76
N	NR	5.69	3.5	193.65	0.6	0.5	212.9	3.10	108	123.5	187	2.5	215	8.4	5.76
N	NR	2.10	1.3	122.60	0.4	0.5	130.7	1.12	105	105.5	120	1	132	2.9	0.31
N	NR	3.30	1.9	137.60	0.6	0.5	145.7	1.70	106.5	111	133.5	1	147	4.7	0.828
—	—	—	—	—	—	—	—	—	105	—	145	1	—	—	0.945
N	NR	3.71	3.1	145.24	0.6	0.5	159.7	2.82	108	112.5	142	1.5	162	6.1	1.29
N	NR	3.71	3.1	145.24	0.6	0.5	159.7	2.82	108	112.5	142	1.5	162	6.1	1.29
N	NR	5.69	3.5	173.66	0.6	0.5	192.9	3.10	111	121.5	169	2	195	8.4	3.17
N	NR	5.69	3.5	173.66	0.6	0.5	192.9	3.10	111	121.5	169	2	195	8.4	3.17
—	—	—	—	—	—	—	—	—	113	133	202	2.5	—	—	7.04
N	NR	2.10	1.3	127.60	0.4	0.5	135.7	1.12	110	110.5	125	1	137	2.9	0.324
N	NR	3.30	1.9	142.60	0.6	0.5	150.7	1.70	111.5	116	138.5	1	152	4.7	0.856
—	—	—	—	—	—	—	—	—	110	—	155	1	—	—	1.24
N	NR	3.71	3.1	155.22	0.6	0.5	169.7	2.82	114	120	151	2	172	6.1	1.58
N	NR	3.71	3.1	155.22	0.6	0.5	169.7	2.82	114	120	151	2	172	6.1	1.58
N	NR	5.69	3.5	183.64	0.6	0.5	202.9	3.10	116	127.5	179	2	205	8.4	3.79
N	NR	5.69	3.5	183.64	0.6	0.5	202.9	3.10	116	127.5	179	2	205	8.4	3.79
—	—	—	—	—	—	—	—	—	118	138	212	2.5	—	—	8.09
N	NR	2.50	1.9	137.60	0.6	0.5	145.7	1.7	115	117	135	1	147	3.9	0.497
N	NR	3.30	1.9	147.60	0.6	0.5	155.7	1.7	116.5	121	143.5	1	157	4.7	0.893
—	—	—	—	—	—	—	—	—	115	—	165	1	—	—	1.51
N	NR	3.71	3.5	163.65	0.6	0.5	182.9	3.1	119	124.5	161	2	185	6.4	1.94
N	NR	3.71	3.5	163.65	0.6	0.5	182.9	3.1	119	124.5	161	2	185	6.4	1.94
N	NR	5.69	3.5	193.65	0.6	0.5	212.9	3.1	121	134	189	2	215	8.4	4.45
—	—	—	—	—	—	—	—	—	123	147	227	2.5	—	—	9.51


Remarks 1. Bearings marked with an asterisk (*) are NSKHPS bearings.

Single-Row Deep Groove Ball Bearings

Bore Diameter 120 – 160 mm

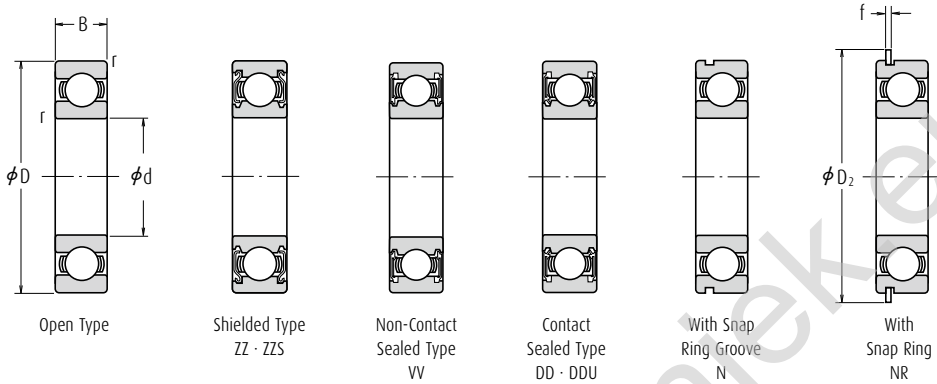

Boundary Dimensions (mm)				Basic Load Ratings (N) (kgf)				Factor f_0	Limiting Speeds (min ⁻¹)			Bearing Numbers			
d	D	B	r min.	C_r	C_{or}	C_r	C_{or}		Grease		Oil	Open	Shielded	Sealed	
								Open Z · ZZ · V · VV	DU DDU	Open Z					
120	150	16	1	28 900	35 500	2 950	3 650	17.3	4 000	2 200	4 800	6824	ZZ	VV	DD
	165	22	1.1	53 000	54 000	5 400	5 500	16.5	3 800	—	4 500	6924	ZZ	—	—
	180	19	1	56 500	57 500	5 800	5 850	16.5	3 600	—	4 300	16024	—	—	—
	180	28	2	88 000	80 000	9 000	8 150	15.7	3 600	2 200	4 300	6024	ZZ	VV	DDU
	180	28	2.0	92 500	80 000	—	—	15.7	4 000	2 200	5 000	6024 ^h	ZZ	VV	DDU
	215	40	2.1	155 000	131 000	15 800	13 400	14.4	2 600	2 000	3 200	6224	ZZ	VV	DDU
130	260	55	3	207 000	185 000	21 100	18 800	13.5	2 200	1 800	2 800	6324	ZZS	—	DDU
	165	18	1.1	37 000	44 000	3 750	4 450	17.1	3 600	2 000	4 300	6826	ZZS	VV	DD
	180	24	1.5	65 000	67 500	6 650	6 850	16.5	3 400	—	4 000	6926	ZZ	—	—
	200	22	1.1	75 500	77 500	7 700	7 900	16.4	3 000	—	3 600	16026	—	—	—
	200	33	2	106 000	101 000	10 800	10 300	15.8	3 000	1 900	3 600	6026	ZZ	—	DDU
	230	40	3	167 000	146 000	17 000	14 900	14.5	2 400	—	3 000	6226	ZZ	—	—
140	280	58	4	229 000	214 000	23 400	21 800	13.6	2 200	—	2 600	6326	ZZS	—	—
	175	18	1.1	38 500	48 000	3 900	4 850	17.3	3 400	1 900	4 000	6828	ZZ	VV	DDU
	190	24	1.5	66 500	72 000	6 800	7 300	16.6	3 200	—	3 800	6928	ZZS	VV	—
	210	22	1.1	77 500	82 500	7 900	8 400	16.5	2 800	—	3 400	16028	—	—	—
	210	33	2	110 000	109 000	11 200	11 100	16.0	2 800	1 800	3 400	6028	ZZ	—	DDU
	250	42	3	166 000	150 000	17 000	15 300	14.9	2 200	1 700	2 800	6228	ZZS	—	DDU
150	300	62	4	253 000	246 000	25 800	25 100	13.6	2 000	—	2 400	6328	ZZS	—	—
	190	20	1.1	47 500	58 500	4 850	5 950	17.1	3 200	1 800	3 800	6830	ZZ	VV	DDU
	210	28	2	85 000	90 500	8 650	9 200	16.5	2 600	1 700	3 200	6930	ZZS	—	DDU
	225	24	1.1	84 000	91 000	8 550	9 250	16.6	2 600	—	3 000	16030	—	—	—
	225	35	2.1	126 000	126 000	12 800	12 800	15.9	2 600	1 700	3 000	6030	ZZ	VV	DDU
	270	45	3	176 000	168 000	18 000	17 100	15.1	2 000	—	2 600	6230	ZZS	—	—
160	320	65	4	274 000	284 000	28 000	28 900	13.9	1 800	—	2 200	6330	ZZS	—	—
	200	20	1.1	48 500	61 000	4 950	6 250	17.2	2 600	1 700	3 200	6832	ZZS	VV	DDU
	220	28	2	87 000	96 000	8 850	9 800	16.6	2 600	1 600	3 000	6932	ZZS	—	DDU
	240	25	1.5	99 000	108 000	10 100	11 000	16.5	2 400	—	2 800	16032	—	—	—
	240	38	2.1	137 000	135 000	13 900	13 800	15.9	2 400	1 600	2 800	6032	ZZ	—	DDU
	290	48	3	185 000	186 000	18 900	19 000	15.4	1 900	—	2 400	6232	ZZS	—	—
340	68	4	278 000	287 000	28 300	29 200	13.9	1 700	—	2 000	6332	ZZS	—	—	

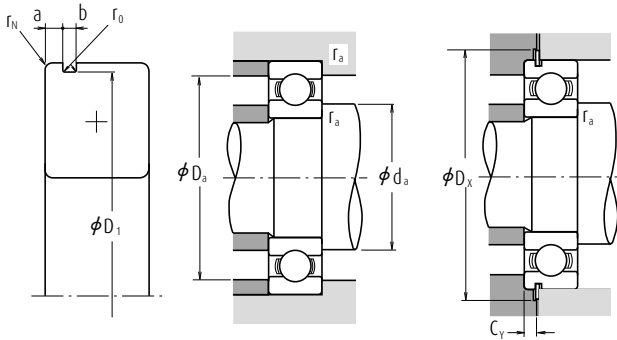

Dynamic Equivalent Load $P = X F_r + Y F_a$

$\frac{f_a F_a}{C_{or}}$	e	$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.30
0.345	0.22	1	0	0.56	1.99
0.689	0.26	1	0	0.56	1.71
1.03	0.28	1	0	0.56	1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34	1	0	0.56	1.31
3.45	0.38	1	0	0.56	1.15
5.17	0.42	1	0	0.56	1.04
6.89	0.44	1	0	0.56	1.00

Static Equivalent Load

$$\frac{F_a}{F_r} > 0.8, P_0 = 0.6 F_r + 0.5 F_a$$


$$\frac{F_a}{F_r} \leq 0.8, P_0 = F_r$$

With Snap Ring Groove	With Snap Ring	Snap Ring Groove Dimensions (*) (mm)					Snap Ring (*) Dimensions (mm)		Abutment and Fillet Dimensions (mm)					Mass (kg) approx.	
		a max.	b min.	D ₁ max.	r ₀ max.	r _N min.	D ₂ max.	f max.	d _s (?) min.	d _s (?) max.	D _a (?) max.	r _a max.	D _x min.		C _y max.
N	NR	2.50	1.9	147.60	0.6	0.5	155.7	1.7	125	127	145	1	157	3.9	0.537
N	NR	3.70	1.9	161.80	0.6	0.5	171.5	1.7	126.5	132	158.5	1	173	5.1	1.21
—	—	—	—	—	—	—	—	—	125	—	175	1	—	—	1.6
N	NR	3.71	3.5	173.66	0.6	0.5	192.9	3.1	129	134.5	171	2	195	6.4	2.08
N	NR	3.71	3.5	173.66	0.6	0.5	192.9	3.1	129	134.5	171	2	195	6.4	2.08
—	—	—	—	—	—	—	—	—	131	146	204	2	—	—	5.29
—	—	—	—	—	—	—	—	—	133	161	247	2.5	—	—	12.5
N	NR	3.30	1.9	161.80	0.6	0.5	171.5	1.7	136.5	138	158.5	1	173	4.7	0.758
N	NR	3.70	1.9	176.80	0.6	0.5	186.5	1.7	138	144	172	1.5	188	5.1	1.57
—	—	—	—	—	—	—	—	—	136.5	—	193.5	1	—	—	2.4
N	NR	5.69	3.5	193.65	0.6	0.5	212.9	3.1	139	148.5	191	2	215	8.4	3.26
—	—	—	—	—	—	—	—	—	143	157	217	2.5	—	—	5.96
—	—	—	—	—	—	—	—	—	146	175	264	3	—	—	15.2
N	NR	3.30	1.9	171.80	0.6	0.5	181.5	1.7	146.5	148.5	168.5	1	183	4.7	0.832
N	NR	3.70	1.9	186.80	0.6	0.5	196.5	1.7	148	153.5	182	1.5	198	5.1	1.67
—	—	—	—	—	—	—	—	—	146.5	—	203.5	1	—	—	2.84
—	—	—	—	—	—	—	—	—	149	158.5	201	2	—	—	3.48
—	—	—	—	—	—	—	—	—	153	171.5	237	2.5	—	—	7.68
—	—	—	—	—	—	—	—	—	156	187	284	3	—	—	18.5
N	NR	3.30	1.9	186.80	0.6	0.5	196.5	1.7	156.5	160	183.5	1	198	4.7	1.15
—	—	—	—	—	—	—	—	—	159	166	201	2	—	—	3.01
—	—	—	—	—	—	—	—	—	156.5	—	218.5	1	—	—	3.62
—	—	—	—	—	—	—	—	—	161	170	214	2	—	—	4.24
—	—	—	—	—	—	—	—	—	163	186	257	2.5	—	—	10
—	—	—	—	—	—	—	—	—	166	203	304	3	—	—	22.7
N	NR	3.30	1.9	196.80	0.6	0.5	206.5	1.7	166.5	170.5	193.5	1	208	4.7	1.23
—	—	—	—	—	—	—	—	—	169	176	211	2	—	—	2.71
—	—	—	—	—	—	—	—	—	168	—	232	1.5	—	—	4.2
—	—	—	—	—	—	—	—	—	171	181.5	229	2	—	—	5.15
—	—	—	—	—	—	—	—	—	173	202	277	2.5	—	—	12.8
—	—	—	—	—	—	—	—	—	176	215.5	324	3	—	—	26.2

Remarks 1. Bearings marked with an asterisk (*) are NSKHPS bearings.

Single-Row Deep Groove Ball Bearings


Bore Diameter 170 - 240 mm

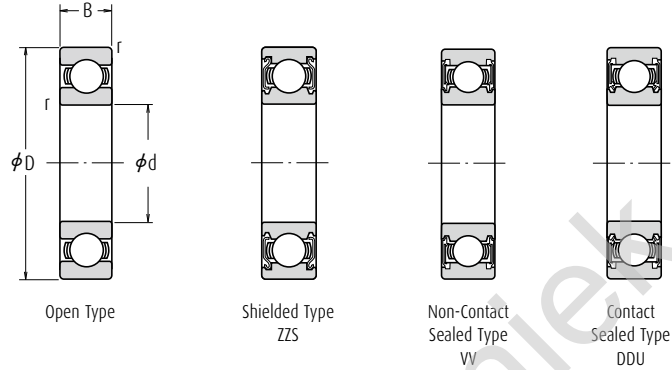

Boundary Dimensions (mm)				Basic Load Ratings (N) (kgf)				Factor f_0	Limiting Speeds (min ⁻¹)			Bearing Numbers		
d	D	B	r min.	C_r	C_{0r}	C_r	C_{0r}		Grease		Oil	Open	Shielded	Sealed
								Open Z	ZZ V	DU DDU	Open Z			
170	215	22	1.1	60 000	75 000	6 100	7 650	17.1	2 600	1 600	3 000	6834	ZZS	VV DDU
	230	28	2	86 000	97 000	8 750	9 850	16.7	2 400	—	2 800	6934	ZZS	—
	260	28	1.5	114 000	126 000	11 700	12 900	16.5	2 200	—	2 600	16034	—	—
	260	42	2.1	161 000	161 000	16 400	16 400	15.8	2 200	—	2 600	6034	ZZS	VV
	310	52	4	212 000	224 000	21 700	22 800	15.3	1 800	—	2 200	6234	ZZS	—
180	360	72	4	325 000	355 000	33 500	36 000	13.6	1 600	—	2 000	6334	—	—
	225	22	1.1	60 500	78 500	6 200	8 000	17.2	2 400	—	2 800	6836	—	VV
	250	33	2	119 000	128 000	12 100	13 100	16.4	2 200	—	2 600	6936	ZZS	—
	280	31	2	145 000	157 000	14 700	16 000	16.3	2 000	—	2 400	16036	—	—
	280	46	2.1	180 000	185 000	18 400	18 800	15.6	2 000	—	2 400	6036	ZZS	VV
190	320	52	4	227 000	241 000	23 200	24 600	15.1	1 700	—	2 000	6236	ZZS	—
	380	75	4	355 000	405 000	36 000	41 500	13.9	1 500	—	1 800	6336	—	—
	240	24	1.5	73 000	93 500	7 450	9 550	17.1	2 200	—	2 600	6838	—	VV
	260	33	2	113 000	127 000	11 500	13 000	16.6	2 200	—	2 600	6938	—	—
	290	31	2	149 000	168 000	15 200	17 100	16.4	2 000	—	2 400	16038	—	—
200	290	46	2.1	188 000	201 000	19 200	20 500	15.8	2 000	—	2 400	6038	ZZS	—
	340	55	4	255 000	282 000	26 000	28 700	15.0	1 600	—	2 000	6238	ZZS	—
	400	78	5	355 000	415 000	36 000	42 500	14.1	1 400	—	1 700	6338	—	—
	250	24	1.5	74 000	98 000	7 550	10 000	17.2	2 200	—	2 600	6840	—	—
	280	38	2.1	143 000	158 000	14 600	16 100	16.4	2 000	—	2 400	6940	ZZS	—
220	310	34	2	161 000	180 000	16 400	18 300	16.4	1 900	—	2 200	16040	—	—
	310	51	2.1	207 000	226 000	21 100	23 000	15.6	1 900	—	2 200	6040	ZZS	—
	360	58	4	269 000	310 000	27 400	31 500	15.2	1 500	—	1 800	6240	ZZS	—
	420	80	5	380 000	445 000	38 500	45 500	13.8	1 300	—	1 600	6340	—	—
	270	24	1.5	76 500	107 000	7 800	10 900	17.4	1 900	—	2 400	6844	ZZS	—
240	300	38	2.1	146 000	169 000	14 900	17 300	16.6	1 800	—	2 200	6944	ZZS	—
	340	37	2.1	180 000	217 000	18 400	22 100	16.5	1 600	—	2 000	16044	—	—
	340	56	3	235 000	271 000	24 000	27 600	15.6	1 700	—	2 000	6044	ZZS	—
	400	65	4	310 000	375 000	31 500	38 500	15.1	1 300	—	1 600	6244	—	—
	460	88	5	410 000	520 000	42 000	53 000	14.3	1 200	—	1 500	6344	—	—
320	300	28	2	98 500	137 000	10 000	14 000	17.3	1 700	—	2 000	6848	—	—
	320	38	2.1	154 000	190 000	15 700	19 400	16.8	1 700	—	2 000	6948	ZZS	—
	360	37	2.1	196 000	243 000	19 900	24 700	16.5	1 500	—	1 900	16048	—	—
	360	56	3	244 000	296 000	24 900	30 000	15.9	1 500	—	1 900	6048	—	—
	440	72	4	340 000	430 000	34 500	44 000	15.2	1 200	—	1 500	6248	—	—
500	95	5	470 000	625 000	48 000	63 500	14.2	1 100	—	1 300	6348	—	—	

Note (1) When heavy axial loads are applied, increase d_0 and decrease D_0 from the above values.

Remarks When using bearings with rotating outer rings, contact NSK if they are sealed or shielded.



Dynamic Equivalent Load $P=XF_r+YF_a$

$\frac{f_a F_a}{C_{or}}$	e	$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.30
0.345	0.22	1	0	0.56	1.99
0.689	0.26	1	0	0.56	1.71
1.03	0.28	1	0	0.56	1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34	1	0	0.56	1.31
3.45	0.38	1	0	0.56	1.15
5.17	0.42	1	0	0.56	1.04
6.89	0.44	1	0	0.56	1.00

Static Equivalent Load


$$\frac{F_a}{F_r} > 0.8, P_0 = 0.6F_r + 0.5F_a$$

$$\frac{F_a}{F_r} \leq 0.8, P_0 = F_r$$

Abutment and Fillet Dimensions (mm)				Mass (kg)
$d_a(t)$		$D_a(t)$	r_a	approx.
min.	max.	max.	max.	
176.5	182.0	208.5	1	1.86
179	186.0	221	2	3.34
178	—	252	1.5	5.71
181	194.5	249	2	6.89
186	215.0	294	3	15.8
186	—	344	3	36.6
186.5	192.0	218.5	1	1.98
189	198.5	241	2	4.16
189	—	271	2	7.5
191	208.0	269	2	8.88
196	223.0	304	3	15.9
196	—	364	3	43.1
198	202.5	232	1.5	2.53
199	—	251	2	5.18
199	—	281	2	7.78
201	218.0	279	2	9.39
206	236.0	324	3	22.3
210	—	380	4	49.7
208	—	242	1.5	2.67
211	222.0	269	2	7.28
209	—	301	2	10
211	231.5	299	2	12
216	252.0	344	3	26.7
220	—	400	4	55.3
228	233.5	262	1.5	2.9
231	242.0	289	2	7.88
231	—	329	2	13.1
233	254.5	327	2.5	18.6
236	—	384	3	37.4
240	—	440	4	73.9
249	—	291	2	4.48
251	262.0	309	2	8.49
251	—	349	2	13.9
253	—	347	2.5	19.9
256	—	424	3	50.5
260	—	480	4	94.4

Single-Row Deep Groove Ball Bearings


Bore Diameter 260 – 360 mm



Open Type

Boundary Dimensions (mm)				Basic Load Ratings (N) (kgf)				Factor f_0	Limiting Speeds (min ⁻¹)		Bearing Numbers Open
d	D	B	r min.	C_r	C_{0r}	C_r	C_{0r}		Grease	Oil	
260	320	28	2	101 000	148 000	10 300	15 100	17.4	1 600	1 900	6852
	360	46	2.1	204 000	255 000	20 800	26 000	16.5	1 500	1 800	6952
	400	44	3	237 000	310 000	24 100	31 500	16.4	1 400	1 700	16052
	400	65	4	291 000	375 000	29 700	38 500	15.8	1 400	1 700	6052
	480	80	5	400 000	540 000	41 000	55 000	15.1	1 100	1 300	6252
	540	102	6	505 000	710 000	51 500	72 500	14.6	1 000	1 200	6352
280	350	33	2	133 000	191 000	13 600	19 500	17.3	1 500	1 700	6856
	380	46	2.1	209 000	272 000	21 300	27 700	16.6	1 400	1 700	6956
	420	44	3	243 000	330 000	24 700	33 500	16.5	1 300	1 600	16056
	420	65	4	300 000	410 000	31 000	41 500	16.0	1 300	1 600	6056
	500	80	5	400 000	550 000	41 000	56 000	15.2	1 000	1 300	6256
	580	108	6	570 000	840 000	58 000	86 000	14.5	900	1 100	6356
300	380	38	2.1	166 000	233 000	17 000	23 800	17.1	1 300	1 600	6860
	420	56	3	269 000	370 000	27 400	38 000	16.4	1 300	1 500	6960
	460	50	4	285 000	405 000	29 000	41 000	16.4	1 200	1 400	16060
	460	74	4	355 000	500 000	36 500	51 000	15.8	1 200	1 400	6060
	540	85	5	465 000	670 000	47 500	68 500	15.1	950	1 200	6260
	580	108	6	570 000	840 000	58 000	86 000	14.5	900	1 100	6360
320	400	38	2.1	168 000	244 000	17 200	24 900	17.2	1 300	1 500	6864
	440	56	3	266 000	375 000	27 100	38 000	16.5	1 200	1 400	6964
	480	50	4	293 000	430 000	29 800	44 000	16.5	1 100	1 300	16064
	480	74	4	390 000	570 000	40 000	58 000	15.7	1 100	1 300	6064
	580	92	5	530 000	805 000	54 500	82 500	15.0	850	1 100	6264
	580	108	6	570 000	840 000	58 000	86 000	14.5	900	1 100	6364
340	420	38	2.1	175 000	265 000	17 800	27 100	17.3	1 200	1 400	6868
	460	56	3	273 000	400 000	27 800	40 500	16.6	1 100	1 300	6968
	520	82	5	440 000	660 000	45 000	67 500	15.6	1 000	1 200	6068
	620	92	6	530 000	820 000	54 000	83 500	15.3	800	1 000	6268
360	440	38	2.1	192 000	290 000	19 600	29 600	17.3	1 100	1 300	6872
	480	56	3	280 000	425 000	28 500	43 000	16.7	1 100	1 300	6972
	540	82	5	460 000	720 000	47 000	73 500	15.7	950	1 200	6072
	650	95	6	555 000	905 000	57 000	92 000	15.4	750	950	6272

Note (1) When heavy axial loads are applied, increase d_0 and decrease D_0 from the above values.



Dynamic Equivalent Load $P=XF_r+YF_a$

$\frac{f_a F_a}{C_{or}}$	e	$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.30
0.345	0.22	1	0	0.56	1.99
0.689	0.26	1	0	0.56	1.71
1.03	0.28	1	0	0.56	1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34	1	0	0.56	1.31
3.45	0.38	1	0	0.56	1.15
5.17	0.42	1	0	0.56	1.04
6.89	0.44	1	0	0.56	1.00

Static Equivalent Load


$$\frac{F_a}{F_r} > 0.8, P_0 = 0.6F_r + 0.5F_a$$

$$\frac{F_a}{F_r} \leq 0.8, P_0 = F_r$$

Abutment and Fillet Dimensions (mm)			Mass (kg)
d_a (') min.	D_a (') max.	r_a max.	approx.
269	311	2	4.84
271	349	2	14
273	387	2.5	21.1
276	384	3	29.4
280	460	4	67
286	514	5	118
289	341	2	7.2
291	369	2	15.1
293	407	2.5	22.7
296	404	3	31.2
300	480	4	70.4
306	554	5	144
311	369	2	10.3
313	407	2.5	23.9
316	444	3	31.5
316	444	3	44.2
320	520	4	87.8
331	389	2	10.8
333	427	2.5	25.3
336	464	3	33.2
336	464	3	46.5
340	560	4	111
351	409	2	11.5
353	447	2.5	26.6
360	500	4	62.3
366	594	5	129
371	429	2	11.8
373	467	2.5	27.9
380	520	4	65.3
386	624	5	145

Single-Row Deep Groove Ball Bearings


Bore Diameter 380 – 600 mm



Open Type

Boundary Dimensions (mm)				Basic Load Ratings (N) (kgf)				Factor f_0	Limiting Speeds (min ⁻¹)		Bearing Numbers
d	D	B	r min.	C_r	C_{0r}	C_r	C_{0r}		Grease	Oil	
380	480	46	2.1	238 000	375 000	24 200	38 000	17.1	1 000	1 200	6876
	520	65	4	325 000	510 000	33 000	52 000	16.6	950	1 200	6976
	560	82	5	455 000	725 000	46 500	74 000	15.9	900	1 100	6076
400	500	46	2.1	241 000	390 000	24 600	40 000	17.2	950	1 200	6880
	540	65	4	335 000	540 000	34 000	55 000	16.7	900	1 100	6980
	600	90	5	510 000	825 000	52 000	84 000	15.7	850	1 000	6080
420	520	46	2.1	245 000	410 000	25 000	41 500	17.3	900	1 100	6884
	560	65	4	340 000	570 000	35 000	58 500	16.8	900	1 100	6984
	620	90	5	530 000	895 000	54 000	91 000	15.8	800	1 000	6084
440	540	46	2.1	248 000	425 000	25 300	43 500	17.4	900	1 100	6888
	600	74	4	395 000	680 000	40 500	69 000	16.6	800	1 000	6988
	650	94	6	550 000	965 000	56 000	98 500	16.0	750	900	6088
460	580	56	3	310 000	550 000	31 500	56 000	17.1	800	1 000	6892
	620	74	4	405 000	720 000	41 500	73 500	16.7	800	950	6992
	680	100	6	605 000	1 080 000	62 000	110 000	15.8	710	850	6092
480	600	56	3	315 000	575 000	32 000	58 500	17.2	800	950	6896
	650	78	5	450 000	815 000	45 500	83 000	16.6	750	900	6996
	700	100	6	605 000	1 090 000	61 500	111 000	15.9	710	850	6096
500	620	56	3	320 000	600 000	33 000	61 000	17.3	750	900	68/500
	670	78	5	460 000	865 000	47 000	88 000	16.7	710	850	69/500
	720	100	6	630 000	1 170 000	64 000	120 000	16.0	670	800	60/500
530	650	56	3	325 000	625 000	33 000	63 500	17.4	710	850	68/530
	710	82	5	455 000	870 000	46 500	88 500	16.8	670	800	69/530
	780	112	6	680 000	1 300 000	69 500	133 000	16.0	600	750	60/530
560	680	56	3	330 000	650 000	33 500	66 500	17.4	670	800	68/560
	750	85	5	525 000	1 040 000	53 500	106 000	16.7	600	750	69/560
	820	115	6	735 000	1 500 000	75 000	153 000	16.2	560	670	60/560
600	730	60	3	355 000	735 000	36 000	75 000	17.5	600	710	68/600
	800	90	5	550 000	1 160 000	56 500	118 000	16.9	560	670	69/600
	870	118	6	790 000	1 640 000	80 500	168 000	16.1	530	630	60/600

Note (1) When heavy axial loads are applied, increase d_0 and decrease D_0 from the above values.



Dynamic Equivalent Load $P=XF_r+YF_a$

$\frac{f_a F_a}{C_{or}}$	e	$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.30
0.345	0.22	1	0	0.56	1.99
0.689	0.26	1	0	0.56	1.71
1.03	0.28	1	0	0.56	1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34	1	0	0.56	1.31
3.45	0.38	1	0	0.56	1.15
5.17	0.42	1	0	0.56	1.04
6.89	0.44	1	0	0.56	1.00

Static Equivalent Load


$$\frac{F_a}{F_r} > 0.8, P_0 = 0.6F_r + 0.5F_a$$

$$\frac{F_a}{F_r} \leq 0.8, P_0 = F_r$$

Abutment and Fillet Dimensions (mm)			Mass (kg)
d_a (I) min.	D_a (I) max.	r_a max.	approx.
391	469	2	19.5
396	504	3	40
400	540	4	68
411	489	2	20.5
416	524	3	42
420	580	4	88.4
431	509	2	21.4
436	544	3	43.6
440	600	4	92.2
451	529	2	22.3
456	584	3	60.2
466	624	5	106
473	567	2.5	34.3
476	604	3	62.6
486	654	5	123
493	587	2.5	35.4
500	630	4	73.5
506	674	5	127
513	607	2.5	37.2
520	650	4	82
526	694	5	131
543	637	2.5	39.8
550	690	4	89.8
556	754	5	184
573	667	2.5	41.5
580	730	4	105
586	793.5	5	203
613	717	2.5	50.9
620	780	4	120
626	844	5	236

Single-Row Deep Groove Ball Bearings


Bore Diameter 630 – 800 mm



Open Type

Boundary Dimensions (mm)				Basic Load Ratings (N) (kgf)				Factor f_0	Limiting Speeds (min ⁻¹)		Bearing Numbers
d	D	B	r min.	C_r	C_{0r}	C_r	C_{0r}		Grease	Oil	
630	780	69	4	420 000	890 000	43 000	90 500	17.3	560	670	68/630
	850	100	6	625 000	1 350 000	64 000	138 000	16.7	530	630	69/630
	920	128	7.5	750 000	1 620 000	76 500	165 000	16.4	480	600	60/630
670	820	69	4	435 000	965 000	44 500	98 000	17.4	500	630	68/670
	900	103	6	675 000	1 460 000	68 500	149 000	16.7	480	560	69/670
	980	136	7.5	765 000	1 730 000	78 000	177 000	16.6	450	530	60/670
710	870	74	4	480 000	1 100 000	49 000	113 000	17.4	480	560	68/710
	950	106	6	715 000	1 640 000	72 500	167 000	16.8	450	530	69/710
750	920	78	5	525 000	1 260 000	53 500	128 000	17.4	430	530	68/750
	1 000	112	6	785 000	1 840 000	80 000	188 000	16.7	400	500	69/750
800	980	82	5	530 000	1 310 000	54 000	133 000	17.5	400	480	68/800
	1 060	115	6	825 000	2 050 000	84 500	209 000	16.8	380	450	69/800

Note (1) When heavy axial loads are applied, increase d_3 and decrease D_3 from the above values.



Dynamic Equivalent Load $P=XF_r+YF_a$

$\frac{f_a F_a}{C_{or}}$	e	$\frac{F_a \leq e}{F_r}$		$\frac{F_a > e}{F_r}$	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.30
0.345	0.22	1	0	0.56	1.99
0.689	0.26	1	0	0.56	1.71
1.03	0.28	1	0	0.56	1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34	1	0	0.56	1.31
3.45	0.38	1	0	0.56	1.15
5.17	0.42	1	0	0.56	1.04
6.89	0.44	1	0	0.56	1.00

Static Equivalent Load


$$\frac{F_a}{F_r} > 0.8, P_0 = 0.6F_r + 0.5F_a$$

$$\frac{F_a}{F_r} \leq 0.8, P_0 = F_r$$

Abutment and Fillet Dimensions (mm)			Mass (kg)
d_a (1) min.	D_a (1) max.	r_a max.	approx.
646	764	3	71.3
656	824	5	163
662	888	6	285
686	804	3	75.4
696	874	5	181
702	948	6	351
726	854	3	92.6
736	924	5	208
770	900	4	110
776	974	5	245
820	960	4	132
826	1034	5	275

Deep Groove Ball Bearings

Double Row | Bore 10–90 mm

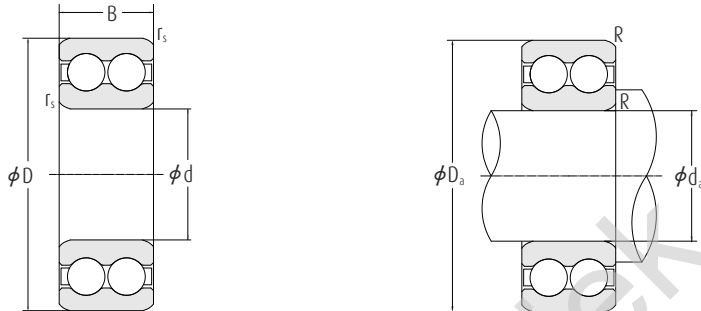


Dimensions				Abbreviation	Load ratings	
d	D	B	r _s min		dyn. C	stat. C ₀
mm					kN	
10	30	14	0.6	4200BTNG	9.15	5.2
12	32	14	0.6	4201BTNG	9.30	5.5
15	35	14	0.6	4202BTNG	10.4	6.7
	42	17	1.0	4302BTNG	14.6	9.2
17	40	16	0.6	4203BTNG	14.6	9.5
	47	19	1.0	4303BTNG	19.6	13.2
20	47	18	1.0	4204BTNG	18.0	12.7
	52	21	1.1	4304BTNG	23.2	16.0
25	52	18	1.0	4205BTNG	19.3	14.6
	62	24	1.1	4305BTNG	31.5	22.4
30	62	20	1.0	4206BTNG	26.0	20.8
	72	27	1.1	4306BTNG	40.0	30.5
35	72	23	1.1	4207BTNG	32.0	26.0
	80	31	1.5	4307BTNG	51.0	38.0
40	80	23	1.1	4208BTNG	34.0	30.0
	90	33	1.5	4308BTNG	63.0	48.0
45	85	23	1.1	4209BTNG	36.0	33.5
	100	36	1.5	4309BTNG	72.0	60.0
50	90	23	1.1	4210BTNG	37.5	36.5
	110	40	2.0	4310BTNG	90.0	75.0
55	100	25	1.5	4211BTNG	43.0	43.0
	120	43	2.0	4311BTNG	104.0	90.0
60	110	28	1.5	4212BTNG	57.0	58.5
	130	46	2.1	4312BTNG	120.0	106.0
65	120	31	1.5	4213BTNG	67.0	67.0
	140	48	2.1	4313BTNG	129.0	98.0
70	125	31	1.5	4214BTNG	69.5	73.5
	150	51	2.1	4314BTNG	146.0	114.0
75	130	31	1.5	4215BTNG	73.5	80.0
	160	55	2.1	4315BTNG	170.0	134.0
80	140	33	2.0	4216BTNG	80.0	90.0
85	150	36	2.0	4217BTNG	93.0	106.0
90	160	40	2.0	4218BTNG	112.0	122.0



Speed limits		Abutment dimensions			Weight
Grease	Oil	d ₀ min	D ₀ max	R min	kg
min ⁻¹					
18 000	24 000	14.0	26.0	0.6	0.049
16 000	20 000	16.0	28.0	0.6	0.053
14 000	18 000	19.0	31.0	0.6	0.059
13 000	17 000	20.0	37.0	1.0	0.120
13 000	18 000	21.0	36.0	1.0	0.090
11 000	17 000	22.0	42.0	1.0	0.160
10 000	14 000	25.0	42.0	1.0	0.140
9 500	13 000	26.5	45.5	1.0	0.210
9 000	12 000	30.0	47.0	1.0	0.160
8 000	10 000	31.5	55.5	1.0	0.340
7 500	9 500	35.0	57.0	1.0	0.260
6 700	8 500	36.5	65.5	1.0	0.500
6 700	8 500	41.5	65.5	1.0	0.400
6 300	8 000	43.0	72.0	1.5	0.690
6 000	7 500	46.5	73.5	1.0	0.500
5 600	7 000	48.0	82.0	1.5	0.950
5 600	7 000	51.5	78.5	1.0	0.540
4 800	6 000	53.0	92.0	1.5	1.250
5 000	6 300	56.5	83.5	1.0	0.580
4 300	5 300	59.0	101.0	2.0	1.700
4 500	5 600	63.0	92.0	1.5	0.800
4 000	5 000	64.0	111.0	2.0	2.150
4 000	5 000	68.0	102.0	1.5	1.100
3 600	4 500	71.0	119.0	2.0	2.650
3 800	4 800	73.0	112.0	1.5	1.450
3 600	4 500	76.0	129.0	2.0	3.250
3 600	4 500	78.0	117.0	1.5	1.500
3 200	4 000	81.0	139.0	2.0	3.950
3 400	4 300	83.0	122.0	1.5	1.600
3 000	3 800	86.0	149.0	2.0	5.380
3 200	4 000	89.0	131.0	2.0	2.000
3 000	3 800	94.0	141.0	2.0	2.550
2 800	3 600	99.0	151.0	2.0	3.200

Maximum Type Ball Bearings

Bore Diameter 25 - 110 mm



Open Type




Shielded Type
(One Shield) Z



Shielded Type
(Two Shields) ZZ

Boundary Dimensions (mm)				Basic Load Ratings (N) (kgf)				Limiting Speeds (min ⁻¹)		
d	D	B	r min.	C _r	C _{0r}	C _r	C _{0r}	Grease		Oil
								Open Z · ZZ	Open Z	Open
25	52	15	1	14 400	10 500	1 470	1 070	12 000		15 000
	62	17	1.1	21 500	15 500	2 200	1 580	11 000		13 000
30	62	16	1	21 000	16 300	2 150	1 660	10 000		12 000
	72	19	1.1	27 900	20 700	2 840	2 110	9 000		11 000
35	72	17	1.1	27 800	22 100	2 830	2 250	9 000		11 000
	80	21	1.5	37 000	29 100	3 800	2 970	8 000		9 500
40	80	18	1.1	35 500	28 800	3 600	2 940	8 000		9 500
	90	23	1.5	46 500	36 000	4 750	3 650	7 500		9 000
45	85	19	1.1	37 000	32 000	3 800	3 250	7 500		9 000
	100	25	1.5	55 500	44 000	5 650	4 500	6 300		8 000
50	90	20	1.1	39 000	35 000	3 950	3 550	6 700		8 500
	110	27	2	65 000	52 500	6 600	5 350	6 000		7 100
55	100	21	1.5	48 000	44 000	4 900	4 500	6 300		7 500
	120	29	2	75 000	61 500	7 650	6 250	5 600		6 700
60	110	22	1.5	58 000	54 000	5 950	5 550	5 600		6 700
	130	31	2.1	85 500	71 500	8 700	7 300	5 000		6 000
65	120	23	1.5	63 500	60 000	6 450	6 150	5 300		6 300
	140	33	2.1	103 000	89 500	10 500	9 150	4 800		5 600
70	125	24	1.5	69 000	66 000	7 050	6 750	5 000		6 000
	150	35	2.1	115 000	102 000	11 800	10 400	4 300		5 300
75	130	25	1.5	72 000	72 000	7 350	7 300	4 500		5 600
	160	37	2.1	126 000	116 000	12 800	11 800	4 000		5 000
80	140	26	2	84 000	85 000	8 600	8 650	4 300		5 300
	170	39	2.1	136 000	130 000	13 900	13 300	3 800		4 500
85	150	28	2	93 000	93 000	9 500	9 450	4 000		5 000
	180	41	3	147 000	145 000	15 000	14 800	3 600		4 300
90	160	30	2	107 000	107 000	10 900	10 900	3 800		4 500
	190	43	3	158 000	161 000	16 100	16 400	3 400		4 000
95	170	32	2.1	121 000	123 000	12 300	12 500	3 600		4 300
	200	45	3	169 000	178 000	17 300	18 100	2 800		3 600
100	180	34	2.1	136 000	140 000	13 800	14 200	3 400		4 000
	205	36	2.1	148 000	157 000	15 000	16 000	3 200		3 800
110	200	38	2.1	160 000	176 000	16 300	17 900	2 800		3 400

Remarks When using Maximum Type Ball Bearings, please contact NSK.

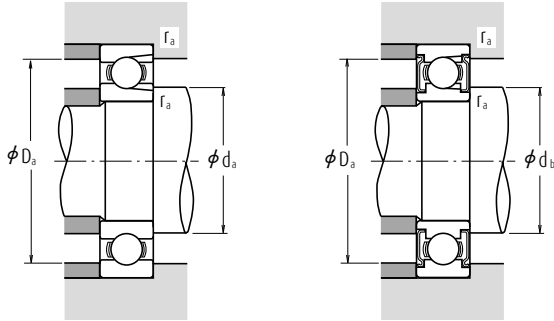

Bearing Numbers		Abutment and Fillet Dimensions (mm)				Mass (kg)
With One Shielded	With Two Shields	d_a min.	d_b max.	D_a max.	r_a max.	approx.
BL 205 Z	BL 205 ZZ	30	32	47	1	0.133
BL 305 Z	BL 305 ZZ	31.5	36	55.5	1	0.246
BL 206 Z	BL 206 ZZ	35	38.5	57	1	0.215
BL 306 Z	BL 306 ZZ	36.5	42	65.5	1	0.364
BL 207 Z	BL 207 ZZ	41.5	44.5	65.5	1	0.307
BL 307 Z	BL 307 ZZ	43	44.5	72	1.5	0.486
BL 208 Z	BL 208 ZZ	46.5	50	73.5	1	0.394
BL 308 Z	BL 308 ZZ	48	52.5	82	1.5	0.685
BL 209 Z	BL 209 ZZ	51.5	55.5	78.5	1	0.449
BL 309 Z	BL 309 ZZ	53	61.5	92	1.5	0.883
BL 210 Z	BL 210 ZZ	56.5	60	83.5	1	0.504
BL 310 Z	BL 310 ZZ	59	68	101	2	1.16
BL 211 Z	BL 211 ZZ	63	66.5	92	1.5	0.667
BL 311 Z	BL 311 ZZ	64	72.5	111	2	1.49
BL 212 Z	BL 212 ZZ	68	74.5	102	1.5	0.856
BL 312 Z	BL 312 ZZ	71	79	119	2	1.88
BL 213 Z	BL 213 ZZ	73	80	112	1.5	1.09
BL 313 Z	BL 313 ZZ	76	85.5	129	2	2.36
BL 214 Z	BL 214 ZZ	78	84	117	1.5	1.19
BL 314 Z	BL 314 ZZ	81	92	139	2	2.87
BL 215 Z	BL 215 ZZ	83	90	122	1.5	1.29
BL 315 Z	BL 315 ZZ	86	98.5	149	2	3.43
BL 216 Z	BL 216 ZZ	89	95.5	131	2	1.61
BL 316 Z	BL 316 ZZ	91	104.5	159	2	4.08
BL 217 Z	BL 217 ZZ	94	102	141	2	1.97
BL 317 Z	BL 317 ZZ	98	110.5	167	2.5	4.77
BL 218 Z	BL 218 ZZ	99	107.5	151	2	2.43
BL 318 Z	BL 318 ZZ	103	117	177	2.5	5.45
BL 219 Z	BL 219 ZZ	106	114	159	2	2.95
BL 319 Z	BL 319 ZZ	108	124	187	2.5	6.4
BL 220 Z	BL 220 ZZ	111	121.5	169	2	3.54
BL 221 Z	BL 221 ZZ	116	127.5	179	2	4.23
—	—	121	—	189	2	4.84