




DESIGN, TYPES, AND FEATURES




The outer ring has a spherical raceway and its center of curvature coincides with that of the bearing; therefore, the axis of the inner ring, balls and cage can deflect to some extent around the bearing center. This type is recommended when the alignment of the shaft and housing is difficult and when the shaft may bend. Since the contact angle is small, the axial load capacity is low.

Pressed steel cages are usually used.

PROTRUSION AMOUNT OF BALLS

Among self-aligning ball bearings, there are some in which the balls protrude from the side face as shown below. This protrusion amount b_1 is listed in the following table.



Bearing No.	b_1 (mm)
2222(K), 2316(K)	0.5
2319(K), 2320(K) 2321, 2322(K)	0.5
1318(K)	1.5
1319(K)	2
1320(K), 1321 1322(K)	3

Table	Pages
8.2	A62 to A65
9.2	A86
9.4	A87
9.12	A92


Tolerances and Running Accuracy
Recommended Fits
Internal Clearance

PERMISSIBLE MISALIGNMENT


The permissible misalignment of self-aligning ball bearings is approximately 0.07 to 0.12 radian (4° to 7°) under normal loads. However, depending on the surrounding structure, such an angle may not be possible. Use care in the structural design.

Self-Aligning Ball Bearings

Bore Diameter 5 – 17 mm



Cylindrical Bore




Tapered Bore

Boundary Dimensions (mm)				Basic Load Ratings (N) {kgf}				Limiting Speeds (min ⁻¹)		Bearing
d	D	B	r min.	C _r	C _{0r}	C _r	C _{0r}	Grease	Oil	Cylindrical Bore
5	19	6	0.3	2 530	475	258	49	30 000	36 000	135
6	19	6	0.3	2 530	475	258	49	30 000	36 000	126
7	22	7	0.3	2 750	600	280	61	26 000	32 000	127
8	22	7	0.3	2 750	600	280	61	26 000	32 000	108
9	26	8	0.6	4 150	895	425	91	26 000	30 000	129
10	30	9	0.6	5 550	1 190	570	121	22 000	28 000	1200
	30	9	0.6	5 500	1 530	—	—	24 000	30 000	1200TN
30	14	0.6	7 450	1 590	760	162	24 000	28 000	2200	
30	14	0.6	7 200	2 040	—	—	24 000	30 000	2200TN	
35	11	0.6	7 350	1 620	750	165	20 000	24 000	1300	
35	17	0.6	9 200	2 010	935	205	18 000	22 000	2300	
12	32	10	0.6	5 700	1 270	580	130	22 000	26 000	1201
	32	10	0.6	5 600	1 270	—	—	24 000	30 000	1201TNG
32	14	0.6	7 750	1 730	790	177	22 000	26 000	2201	
32	14	0.6	9 000	1 960	—	—	20 000	26 000	2201ETNG	
37	12	1.0	9 650	2 160	985	221	18 000	22 000	1301	
37	12	1.0	9 500	2 160	—	—	18 000	22 000	1301TN	
37	17	1.0	12 100	2 730	1 240	278	17 000	22 000	2301	
15	35	11	0.6	7 600	1 750	775	179	18 000	22 000	1202
	35	11	0.6	7 500	1 760	—	—	20 000	26 000	1202TNG
35	14	0.6	7 800	1 850	795	188	18 000	22 000	2202	
35	14	0.6	9 150	2 080	—	—	19 000	24 000	2202ETNG	
42	13	1.0	9 700	2 290	990	234	16 000	20 000	1302	
42	13	1.0	9 500	2 280	—	—	17 000	20 000	1302TN	
42	17	1.0	12 300	2 910	1 250	296	14 000	18 000	2302	
42	17	1.0	12 000	2 900	—	—	16 000	19 000	2302ETNG	
17	40	12	0.6	8 000	2 010	815	205	16 000	20 000	1203
	40	12	0.6	8 000	2 040	—	—	18 000	22 000	1203TNG
40	16	0.6	9 950	2 420	1 010	247	16 000	20 000	2203	
40	16	0.6	11 400	2 750	—	—	16 000	19 000	2203ETNG	
47	14	1.0	12 700	3 200	1 300	325	14 000	17 000	1303	
47	14	1.0	12 500	3 200	—	—	15 000	18 000	1303TN	
47	19	1.0	14 700	3 550	1 500	365	13 000	16 000	2303	
47	19	1.0	14 300	3 550	—	—	14 000	17 000	2303TN	

Note (1) The suffix K represents bearings with tapered bores (1 : 12)

Remarks For the dimensions related to adapters, refer to Page B346.



Dynamic Equivalent Load $P = X F_r + Y F_a$

$F_a/F_r \leq e$		$F_a/F_r > e$	
X	Y	X	Y
1	Y_3	0.65	Y_3


Static Equivalent Load $P_0 = F_r + Y_0 F_a$

The values of e , Y_2 , Y_3 , and Y_0 are listed in the table below.


Numbers Tapered Bore(1)	Abutment and Fillet Dimensions (mm)			Constant e	Axial Load Factors			Mass (kg) approx.
	d_a min.	D_a max.	r_a max.		Y_2	Y_3	Y_0	
—	7.0	17.0	0.3	0.34	2.9	1.9	1.9	0.009
—	8.0	17.0	0.3	0.34	2.9	1.9	1.9	0.008
—	9.0	20.0	0.3	0.31	3.1	2.0	2.1	0.013
—	10.0	20.0	0.3	0.31	3.1	2.0	2.1	0.016
—	13.0	22.0	0.6	0.32	3.1	2.0	2.1	0.021
—	14.0	26.0	0.6	0.32	3.1	2.0	2.1	0.033
—	14.0	26.0	0.6	0.32	3.00	2.0	2.1	0.034
—	14.0	26.0	0.6	0.64	1.5	0.98	1.0	0.042
—	14.0	26.0	0.6	0.66	1.50	1.0	1.0	0.047
—	14.0	31.0	0.6	0.35	2.8	1.8	1.9	0.057
—	14.0	31.0	0.6	0.71	1.4	0.89	0.93	0.077
—	16.0	28.0	0.6	0.36	2.7	1.8	1.8	0.039
—	16.0	28.0	0.6	0.37	2.60	1.7	0.040	0.040
—	16.0	28.0	0.6	0.58	1.7	1.1	1.1	0.048
—	16.0	28.0	0.6	0.53	1.85	1.2	1.3	0.053
—	17.0	32.0	1.0	0.33	2.9	1.9	2.0	0.066
—	17.0	32.0	1.0	0.35	2.80	1.8	1.9	0.067
—	17.0	32.0	1.0	0.60	1.6	1.1	1.1	0.082
—	19.0	31.0	0.6	0.32	3.1	2.0	2.1	0.051
—	19.0	31.0	0.6	0.34	2.90	1.9	2.0	0.049
—	19.0	31.0	0.6	0.50	1.9	1.3	1.3	0.055
—	19.0	31.0	0.6	0.46	2.10	1.4	1.4	0.060
—	20.0	37.0	1.0	0.33	2.9	1.9	2.0	0.093
—	20.0	37.0	1.0	0.35	2.80	1.8	1.9	0.094
—	20.0	37.0	1.0	0.51	1.9	1.2	1.3	0.108
—	20.0	37.0	1.0	0.51	1.90	1.2	1.3	0.110
—	21.0	36.0	0.6	0.31	3.1	2.0	2.1	0.072
—	21.0	36.0	0.6	0.33	3.00	1.9	2.0	0.073
—	21.0	36.0	0.6	0.50	1.9	1.3	1.3	0.085
—	21.0	36.0	0.6	0.46	2.10	1.4	1.4	0.088
—	22.0	42.0	1.0	0.32	3.1	2.0	2.1	0.13
—	22.0	42.0	1.0	0.32	3.00	1.9	2.0	0.130
—	22.0	42.0	1.0	0.51	1.9	1.2	1.3	0.15
—	22.0	42.0	1.0	0.53	1.90	1.2	1.3	0.160

Self-Aligning Ball Bearings

Bore Diameter 20 – 35 mm



Cylindrical Bore




Tapered Bore

Boundary Dimensions (mm)				Basic Load Ratings (N) {kgf}				Limiting Speeds (min ⁻¹)		Bearing	
d	D	B	r min.	C _r	C _{0r}	C _r	C _{0r}	Grease	Oil	Cylindrical Bore	
20	47	14	1.0	10 000	2 610	1 020	266	14 000	17 000	1204	
	47	14	1.0	10 000	2 650	—	—	15 000	18 000	1204TNG	
	47	18	1.0	12 800	3 300	1 310	340	14 000	17 000	2204	
	47	18	1.0	14 300	3 550	—	—	14 000	17 000	2204ETNG	
	52	15	1.1	12 600	3 350	1 280	340	12 000	15 000	1304	
	52	15	1.1	12 500	3 350	—	—	13 000	16 000	1304TNG	
	52	21	1.1	18 500	4 700	1 880	480	11 000	14 000	2304	
	52	21	1.1	18 000	4 650	—	—	13 000	16 000	2304J	
	52	15	1.0	12 200	3 300	1 250	335	12 000	14 000	1205	
	52	15	1.0	12 200	3 350	—	—	13 000	16 000	1205TNG	
25	52	18	1.0	12 400	3 450	1 270	350	12 000	14 000	2205	
	52	18	1.0	17 000	4 400	—	—	12 000	15 000	2205ETNG	
	62	17	1.1	18 200	5 000	1 850	510	10 000	13 000	1305	
	62	17	1.1	18 000	5 000	—	—	11 000	14 000	1305TNG	
	62	24	1.1	24 900	6 600	2 530	675	9 500	12 000	2305	
	62	24	1.1	24 500	6 550	—	—	10 000	13 000	2305TNG	
	30	62	16	1.0	15 800	4 650	1 610	475	10 000	12 000	1206
		62	16	1.0	15 600	4 650	—	—	11 000	14 000	1206TNG
62		20	1.0	15 300	4 550	1 560	460	10 000	12 000	2206	
62		20	1.0	25 500	6 950	—	—	9 500	12 000	2206ETNG	
72		19	1.1	21 400	6 300	2 190	645	8 500	11 000	1306	
72		19	1.1	21 200	6 300	—	—	9 000	11 000	1306TNG	
72		27	1.1	32 000	8 750	3 250	895	8 000	10 000	2306	
72		27	1.1	31 500	8 650	—	—	8 500	10 000	2306TNG	
35		72	17	1.1	15 900	5 100	1 620	520	8 500	10 000	1207
		72	17	1.1	16 000	5 200	—	—	9 500	12 000	1207TNG
	72	23	1.1	21 700	6 600	2 210	675	8 500	10 000	2207	
	72	23	1.1	32 000	9 000	—	—	8 000	9 500	2207ETNG	
	80	21	1.5	25 300	7 850	2 580	800	7 500	9 500	1307	
	80	21	1.5	25 000	8 000	—	—	8 000	9 500	1307TNG	
	80	31	1.5	40 000	11 300	4 100	1 150	7 100	9 000	2307	
	80	31	1.5	39 000	11 200	—	—	7 500	9 000	2307TNG	

Note (1) The suffix K represents bearings with tapered bores (1 : 12)

Remarks For the dimensions related to adapters, refer to Page B346 and B347.



Dynamic Equivalent Load $P = X F_r + Y F_a$

$F_a/F_r \leq e$		$F_a/F_r > e$	
X	Y	X	Y
1	Y_3	0.65	Y_3


Static Equivalent Load $P_0 = F_r + Y_0 F_a$

The values of e , Y_2 , Y_3 , and Y_0 are listed in the table below.


Numbers Tapered Bore(!)	Abutment and Fillet Dimensions (mm)			Constant e	Axial Load Factors			Mass (kg) approx.
	d_a min.	D_a max.	r_a max.		Y_2	Y_3	Y_0	
1204 K	25.0	42.0	1.0	0.29	3.4	2.2	2.3	0.12
1204KTNG	25.0	42.0	1.0	0.28	3.50	2.2	2.3	0.120
2204 K	25.0	42.0	1.0	0.47	2.1	1.3	1.4	0.133
2204EKTNG	25.0	42.0	1.0	0.44	2.20	1.5	1.5	0.140
1304 K	26.5	45.5	1.0	0.29	3.4	2.2	2.3	0.165
1304KTNG	26.5	45.5	1.0	0.29	3.30	2.2	2.3	0.160
2304 K	26.5	45.5	1.0	0.50	1.9	1.2	1.3	0.193
2304KJ	26.5	45.5	1.0	0.51	1.90	1.2	1.3	0.210
1205 K	30.0	47.0	1.0	0.28	3.5	2.3	2.4	0.14
1205KTNG	30.0	47.0	1.0	0.27	3.70	2.4	2.5	0.140
2205 K	30.0	47.0	1.0	0.41	2.4	1.5	1.6	0.15
2205EKTNG	30.0	47.0	1.0	0.35	2.80	1.8	1.9	0.160
1305 K	31.5	55.5	1.0	0.28	3.5	2.3	2.4	0.255
1305KTNG	31.5	55.5	1.0	0.28	3.50	2.3	2.4	0.260
2305 K	31.5	55.5	1.0	0.47	2.1	1.4	1.4	0.319
2305EKTNG	31.5	55.5	1.0	0.48	2.00	1.3	1.4	0.340
1206 K	35.0	57.0	1.0	0.25	3.9	2.5	2.6	0.22
1206KTNG	35.0	57.0	1.0	0.25	3.90	2.5	2.7	0.220
2206 K	35.0	57.0	1.0	0.38	2.5	1.6	1.7	0.249
2206EKTNG	35.0	57.0	1.0	0.30	3.30	2.1	2.2	0.260
1306 K	36.5	65.5	1.0	0.26	3.7	2.4	2.5	0.385
1306KTNG	36.5	65.5	1.0	0.26	3.70	2.4	2.5	0.390
2306 K	36.5	65.5	1.0	0.44	2.2	1.4	1.5	0.48
2306EKTNG	36.5	65.5	1.0	0.45	2.20	1.4	1.5	0.500
1207 K	41.5	65.5	1.0	0.23	4.2	2.7	2.8	0.32
1207KTNG	41.5	65.5	1.0	0.22	4.30	2.8	2.9	0.320
2207 K	41.5	65.5	1.0	0.37	2.6	1.7	1.8	0.378
2207EKTNG	41.5	65.5	1.0	0.30	3.30	2.1	2.2	0.400
1307 K	43.0	72.0	1.5	0.26	3.8	2.5	2.6	0.51
1307KTNG	43.0	72.0	1.5	0.26	3.80	2.5	2.6	0.510
2307 K	43.0	72.0	1.5	0.46	2.1	1.4	1.4	0.642
2307EKTNG	43.0	72.0	1.5	0.47	2.10	1.4	1.4	0.680

Self-Aligning Ball Bearings

Bore Diameter 40 – 55 mm



Cylindrical Bore




Tapered Bore

Boundary Dimensions (mm)				Basic Load Ratings (N) {kgf}				Limiting Speeds (min ⁻¹)		Bearing	
d	D	B	r min.	C _r	C _{0r}	C _r	C _{0r}	Grease	Oil	Cylindrical Bore	
40	80	18	1.1	19 300	6 500	1 970	665	7 500	9 000	1208	
	80	18	1.1	19 300	6 550	—	—	8 500	10 000	1208TNG	
	80	23	1.1	22 400	7 350	2 290	750	7 500	9 000	2208	
	80	23	1.1	31 500	9 500	—	—	7 500	9 000	2208TNG	
	90	23	1.5	29 800	9 700	3 050	990	6 700	8 500	1308	
	90	23	1.5	29 000	9 650	—	—	7 000	8 500	1308TNG	
	90	33	1.5	45 500	13 500	4 650	1 380	6 300	8 000	2308	
	90	33	1.5	45 000	13 400	—	—	6 700	8 000	2308TNG	
	45	85	19	1.1	22 000	7 350	2 240	750	7 100	8 500	1209
		85	19	1.1	22 000	7 350	—	—	7 500	9 000	1209TNG
85		23	1.1	23 300	8 150	2 380	830	7 100	8 500	2209	
85		23	1.1	28 000	9 000	—	—	7 000	8 500	2209TNG	
100		25	1.5	38 500	12 700	3 900	1 300	6 000	7 500	1309	
100		25	1.5	38 000	12 900	—	—	6 300	7 500	1309TNG	
100		36	1.5	55 000	16 700	5 600	1 700	5 600	7 100	2309	
100		36	1.5	54 000	16 300	—	—	6 000	7 000	2309TNG	
50	90	20	1.1	22 800	8 100	2 330	830	6 300	8 000	1210	
	90	20	1.1	22 800	8 150	—	—	7 000	8 500	1210TNG	
	90	23	1.1	23 300	8 450	2 380	865	6 300	8 000	2210	
	90	23	1.1	28 000	9 500	—	—	6 700	8 000	2210TNG	
	110	27	2.0	43 500	14 100	4 450	1 440	5 600	6 700	1310	
	110	27	2.0	41 500	14 300	—	—	5 600	6 700	1310TNG	
	110	40	2.0	65 000	20 200	6 650	2 060	5 000	6 300	2310	
	110	40	2.0	64 000	20 000	—	—	5 300	6 300	2310TNG	
55	100	21	1.5	26 900	10 000	2 750	1 020	6 000	7 100	1211	
	100	21	1.5	27 000	10 000	—	—	6 300	7 500	1211TNG	
	100	25	1.5	26 700	9 900	2 720	1 010	6 000	7 100	2211	
	100	25	1.5	39 000	12 700	—	—	5 600	6 700	2211TNG	
	120	29	2.0	51 500	17 900	5 250	1 820	5 000	6 300	1311	
	120	29	2.0	51 000	18 000	—	—	5 000	6 000	1311TNG	
	120	43	2.0	76 500	24 000	7 800	2 450	4 800	6 000	2311	
	120	43	2.0	75 000	23 600	—	—	4 800	5 600	2311TNG	

Notes (1) The suffix K represents bearings with tapered bores (1 : 12)

Remarks For the dimensions related to adapters, refer to Pages B348 and B349.



Dynamic Equivalent Load $P = X F_r + Y F_a$

$F_a/F_r \leq e$		$F_a/F_r > e$	
X	Y	X	Y
1	Y_3	0.65	Y_2


Static Equivalent Load $P_0 = F_r + Y_0 F_a$

The values of e , Y_2 , Y_3 , and Y_0 are listed in the table below.


Numbers Tapered Bore(!)	Abutment and Fillet Dimensions (mm)			Constant e	Axial Load Factors			Mass (kg) approx.
	d_a min.	D_a max.	r_a max.		Y_2	Y_3	Y_0	
1208 K	46.5	73.5	1.0	0.22	4.3	2.8	2.9	0.415
1208KTNG	46.5	73.5	1.0	0.22	4.5	2.9	3.0	0.420
2208 K	46.5	73.5	1.0	0.33	3.0	1.9	2.0	0.477
2208EKTNG	46.5	73.5	1.0	0.26	3.8	2.4	2.5	0.510
1308 K	48.0	82.0	1.5	0.24	4.0	2.6	2.7	0.715
1308KTNG	48.0	82.0	1.5	0.25	3.9	2.5	2.6	0.720
2308 K	48.0	82.0	1.5	0.43	2.3	1.5	1.5	0.889
2308KTNG	48.0	82.0	1.5	0.43	2.3	1.5	1.5	0.93
1209 K	51.5	78.5	1.0	0.21	4.7	3.0	3.1	0.465
1209KTNG	51.5	78.5	1.0	0.21	4.7	3.0	3.2	0.47
2209 K	51.5	78.5	1.0	0.30	3.2	2.1	2.2	0.522
2209EKTNG	51.5	78.5	1.0	0.26	3.8	2.4	2.5	0.55
1309 K	53.0	92.0	1.5	0.25	4.0	2.6	2.7	0.955
1309KTNG	53.0	92.0	1.5	0.25	3.9	2.5	2.6	0.96
2309 K	53.0	92.0	1.5	0.41	2.4	1.5	1.6	1.2
2309KTNG	53.0	92.0	1.5	0.43	2.3	1.5	1.6	1.25
1210 K	56.5	83.5	1.0	0.21	4.7	3.1	3.2	0.525
1210KTNG	56.5	83.5	1.0	0.19	4.9	3.2	3.3	0.53
2210 K	56.5	83.5	1.0	0.28	3.4	2.2	2.3	0.564
2210EKTNG	56.5	83.5	1.0	0.22	4.1	2.6	3.7	0.59
1310 K	59.0	101.0	2.0	0.23	4.2	2.7	2.8	1.25
1310KTNG	59.0	101.0	2.0	0.24	4.0	2.6	2.7	1.20
2310 K	59.0	101.0	2.0	0.42	2.3	1.5	1.6	1.58
2310KTNG	59.0	101.0	2.0	0.43	2.3	1.5	1.5	1.65
1211 K	63.0	92.0	1.5	0.20	4.9	3.2	3.3	0.705
1211KTNG	63.0	92.0	1.5	0.19	5.1	3.3	3.5	0.71
2211 K	63.0	92.0	1.5	0.28	3.5	2.3	2.4	0.746
2211EKTNG	63.0	92.0	1.5	0.22	4.5	2.9	2.1	0.81
1311 K	64.0	111.0	2.0	0.23	4.2	2.7	2.8	1.6
1311KTNG	64.0	111.0	2.0	0.24	4.1	2.7	2.8	1.60
2311 K	64.0	111.0	2.0	0.41	2.4	1.5	1.6	2.03
2311KTNG	64.0	111.0	2.0	0.42	2.3	1.5	1.6	2.10

Self-Aligning Ball Bearings

Bore Diameter 60 – 75 mm




Cylindrical Bore



Tapered Bore

Boundary Dimensions (mm)				Basic Load Ratings (N) {kgf}				Limiting Speeds (min ⁻¹)		Bearing
d	D	B	r min.	C _r	C _{0r}	C _r	C _{0r}	Grease	Oil	Cylindrical Bore
60	110	22	1.5	30 500	11 500	3 100	1 180	5 300	6 300	1212
	110	22	1.5	30 000	11 600	—	—	5 600	6 700	1212TNG
	110	28	1.5	34 000	12 600	3 500	1 290	5 300	6 300	2212
	110	28	1.5	47 500	16 600	—	—	5 300	6 300	2212ETNG
	130	31	2.1	57 500	20 800	5 900	2 130	4 500	5 600	1312
	130	31	2.0	57 500	20 800	—	—	4 800	5 600	1312TNG
	130	46	2.1	88 500	28 300	9 000	2 880	4 300	5 300	2312
65	130	46	2.0	88 500	28 300	—	—	4 300	5 300	2312TNG
	120	23	1.5	31 000	12 500	3 150	1 280	4 800	6 000	1213
	120	23	1.5	31 000	12 500	—	—	5 300	6 300	1213TNG
	120	31	1.5	43 500	16 400	4 450	1 670	4 800	6 000	2213
	120	31	1.5	57 000	19 300	—	—	4 500	5 300	2213ETNG
	140	33	2.1	62 500	22 900	6 350	2 330	4 300	5 300	1313
	140	33	2.1	62 500	22 900	—	—	4 300	5 300	1313J
70	140	48	2.1	97 000	32 500	9 900	3 300	3 800	4 800	2313
	140	48	2.1	96 500	32 500	—	—	4 000	4 800	2313J
	125	24	1.5	35 000	13 800	3 550	1 410	4 800	5 600	1214
	125	24	1.5	34 500	13 700	—	—	5 000	6 000	1214TNG
	125	31	1.5	44 000	17 100	4 500	1 740	4 500	5 600	2214
	125	31	1.5	44 000	17 100	—	—	4 500	5 600	2214J
	150	35	2.1	75 000	27 700	7 650	2 830	4 000	5 000	1314
75	150	35	2.1	67 500	25 100	—	—	4 000	5 000	1314J
	150	51	2.1	111 000	37 500	11 300	3 850	3 600	4 500	2314
	150	51	2.1	111 000	37 500	—	—	3 600	4 300	2314J
	130	25	1.5	39 000	15 700	4 000	1 600	4 300	5 300	1215
	130	25	1.5	39 000	15 600	—	—	4 800	5 600	1215TNG
	130	31	1.5	44 500	17 800	4 550	1 820	4 300	5 300	2215
	130	31	1.5	44 500	17 800	—	—	4 300	5 300	2215J
160	37	2.1	80 000	30 000	8 150	3 050	3 800	4 500	1315	
160	37	2.1	80 000	30 000	—	—	3 800	4 500	1315J	
160	55	2.1	125 000	43 000	12 700	4 400	3 400	4 300	2315	
160	55	2.1	125 000	43 000	—	—	3 400	4 300	2315J	

Notes (1) The suffix K represents bearings with tapered bores (1 : 12)



Dynamic Equivalent Load $P = X F_r + Y F_a$

$F_a/F_r \leq e$		$F_a/F_r > e$	
X	Y	X	Y
1	Y_3	0.65	Y_3


Static Equivalent Load $P_0 = F_r + Y_0 F_a$

The values of e , Y_2 , Y_3 , and Y_0 are listed in the table below.


Numbers Tapered Bore(!)	Abutment and Fillet Dimensions (mm)			Constant e	Axial Load Factors			Mass (kg) approx.
	d_a min.	D_a max.	r_a max.		Y_2	Y_3	Y_0	
1212 K	68.0	102.0	1.5	0.18	5.3	3.4	3.6	0.90
1212KTNG	68.5	101.5	1.5	0.18	5.4	3.5	3.6	0.90
2212 K	68.0	102.0	1.5	0.28	3.5	2.3	2.4	1.03
2212EKTNG	68.5	101.5	1.5	0.23	4.2	2.7	2.8	1.10
1312 K	71.0	119.0	2.0	0.23	4.3	2.8	2.9	2.03
1312KJ	72.0	118.0	2.0	0.23	4.3	2.8	2.9	1.95
2312 K	71.0	119.0	2.0	0.40	2.4	1.6	1.6	2.57
2312KJ	72.0	118.0	2.0	0.40	2.4	1.6	1.7	2.60
1213 K	73.0	112.0	1.5	0.17	5.7	3.7	3.8	1.15
1213KTNG	73.0	112.0	1.5	0.18	5.5	3.6	3.7	1.15
2213 K	73.0	112.0	1.5	0.28	3.5	2.3	2.4	1.4
2213EKTNG	73.0	112.0	1.5	0.23	4.3	2.8	2.9	1.45
1313 K	76.0	129.0	2.0	0.23	4.2	2.7	2.9	2.54
1313KTNG	76.0	128.0	2.0	0.23	4.3	2.8	2.9	2.45
2313 K	76.0	129.0	2.0	0.39	2.5	1.6	1.7	3.2
2313KTNG	76.0	128.0	2.0	0.39	2.5	1.6	1.7	3.25
—	78.0	117.0	1.5	0.18	5.3	3.4	3.6	1.3
—	78.0	116.5	1.5	0.19	5.1	3.3	3.5	1.25
—	78.0	117.0	1.5	0.26	3.7	2.4	2.5	1.52
—	78.0	116.5	1.5	0.26	3.7	2.4	2.5	1.50
—	81.0	139.0	2.0	0.22	4.4	2.8	3.0	3.19
—	81.0	138.0	2.0	0.22	4.4	2.8	3.0	3.00
—	81.0	139.0	2.0	0.38	2.6	1.7	1.8	3.9
—	81.0	138.0	2.0	0.38	2.6	1.7	1.8	4.25
1215 K	83.0	122.0	1.5	0.17	5.6	3.6	3.8	1.41
1215KTNG	83.5	121.5	1.5	0.17	5.6	3.6	3.8	1.35
2215 K	83.0	122.0	1.5	0.25	3.9	2.5	2.6	1.6
2215KJ	83.5	121.5	1.5	0.25	3.9	2.5	2.6	1.60
1315 K	86.0	149.0	2.0	0.22	4.4	2.8	2.9	3.65
1315KJ	87.0	148.0	2.0	0.22	4.4	2.8	3.0	3.55
2315 K	86.0	149.0	2.0	0.38	2.5	1.6	1.7	4.77
2315KJ	87.0	148.0	2.0	0.38	2.6	1.6	1.7	5.15

Self-Aligning Ball Bearings

Bore Diameter 80 – 110 mm



Cylindrical Bore




Tapered Bore

Boundary Dimensions (mm)				Basic Load Ratings (N) {kgf}				Limiting Speeds (min ⁻¹)		Bearing
d	D	B	r min.	C _r	C _{0r}	C _r	C _{0r}	Grease	Oil	Cylindrical Bore
80	140	26	2.0	40 000	17 000	4 100	1 730	4 000	5 000	1216
	140	33	2.0	49 000	19 900	5 000	2 030	4 000	5 000	2216
	170	39	2.1	89 000	33 000	9 100	3 400	3 600	4 300	1316
85	170	58	2.1	130 000	45 000	13 200	4 600	3 200	4 000	* 2316
	150	28	2.0	49 500	20 800	5 050	2 120	3 800	4 500	1217
	150	36	2.0	58 500	23 600	5 950	2 400	3 800	4 800	2217
90	180	41	3.0	98 500	38 000	10 000	3 850	3 400	4 000	1317
	180	60	3.0	142 000	51 500	14 500	5 250	3 000	3 800	2317
	160	30	2.0	57 500	23 500	5 850	2 400	3 600	4 300	1218
95	160	40	2.0	70 500	28 700	7 200	2 930	3 600	4 300	2218
	190	43	3.0	117 000	44 500	12 000	4 550	3 200	3 800	* 1318
	190	64	3.0	154 000	57 500	15 700	5 850	2 800	3 600	2318
100	170	32	2.1	64 000	27 100	6 550	2 770	3 400	4 000	1219
	170	43	2.1	84 000	34 500	8 550	3 500	3 400	4 000	2219
	200	45	3.0	129 000	51 000	13 200	5 200	3 000	3 600	* 1319
105	200	67	3.0	161 000	64 500	16 400	6 550	2 800	3 400	* 2319
	180	34	2.1	69 500	29 700	7 100	3 050	3 200	3 800	1220
	180	46	2.1	94 500	38 500	9 650	3 900	3 200	3 800	2220
110	215	47	3.0	140 000	57 500	14 300	5 850	2 800	3 400	* 1320
	215	73	3.0	187 000	79 000	19 100	8 050	2 400	3 200	* 2320
	190	36	2.1	75 000	32 500	7 650	3 300	3 000	3 600	1221
115	190	50	2.1	109 000	45 000	11 100	4 550	3 000	3 600	2221
	225	49	3.0	154 000	64 500	15 700	6 600	2 600	3 200	* 1321
	225	77	3.0	200 000	87 000	20 400	8 850	2 400	3 000	* 2321
120	200	38	2.1	87 000	38 500	8 900	3 950	2 800	3 400	1222
	200	53	2.1	122 000	51 500	12 500	5 250	2 800	3 400	* 2222
	240	50	3.0	161 000	72 000	16 400	7 300	2 400	3 000	* 1322
	240	80	3.0	211 000	94 500	21 600	9 650	2 200	2 800	* 2322

Notes (1) The suffix K represents bearings with tapered bores (1 : 12)
 (*) The balls of the bearings marked * protrude slightly from the bearing face. The protrusion amounts are shown on Page B87.

Remarks For the dimensions related to adapters, refer to Pages B346 and B349.



Dynamic Equivalent Load $P = XF_r + YF_a$

$F_a/F_r \leq e$		$F_a/F_r > e$	
X	Y	X	Y
1	Y_3	0.65	Y_3


Static Equivalent Load $P_0 = F_r + Y_0 F_a$

The values of e , Y_2 , Y_3 , and Y_0 are listed in the table below.


Numbers Tapered Bore(!)	Abutment and Fillet Dimensions (mm)			Constant e	Axial Load Factors			Mass (kg) approx.
	d_a min.	D_a max.	r_a max.		Y_2	Y_3	Y_0	
1216 K	89	131	2.0	0.16	6.0	3.9	4.1	1.73
2216 K	89	131	2.0	0.25	3.9	2.5	2.7	1.97
1316 K	91	159	2.0	0.22	4.5	2.9	3.1	4.31
* 2316 K	91	159	2.0	0.39	2.5	1.6	1.7	5.54
1217 K	94	141	2.0	0.17	5.7	3.7	3.8	2.09
2217 K	94	141	2.0	0.25	3.9	2.5	2.6	2.48
1317 K	98	167	2.5	0.21	4.6	2.9	3.1	5.13
2317 K	98	167	2.5	0.37	2.6	1.7	1.8	6.56
1218 K	99	151	2.0	0.17	5.8	3.8	3.9	2.55
2218 K	99	151	2.0	0.27	3.7	2.4	2.5	3.13
* 1318 K	103	177	2.5	0.22	4.3	2.8	2.9	5.94
2318 K	103	177	2.5	0.38	2.6	1.7	1.7	7.76
1219 K	106	159	2.0	0.17	5.8	3.7	3.9	3.21
2219 K	106	159	2.0	0.27	3.7	2.4	2.5	3.87
* 1319 K	108	187	2.5	0.23	4.3	2.8	2.9	6.84
* 2319 K	108	187	2.5	0.38	2.6	1.7	1.8	9.01
1220 K	111	169	2.0	0.17	5.6	3.6	3.8	3.82
2220 K	111	169	2.0	0.27	3.7	2.4	2.5	4.53
* 1320 K	113	202	2.5	0.24	4.1	2.7	2.8	8.46
* 2320 K	113	202	2.5	0.38	2.6	1.7	1.8	11.6
—	116	179	2.0	0.18	5.5	3.6	3.7	4.52
—	116	179	2.0	0.28	3.5	2.3	2.4	5.64
—	118	212	2.5	0.23	4.2	2.7	2.9	10
—	118	212	2.5	0.38	2.6	1.7	1.7	14.4
1222 K	121	189	2.0	0.17	5.7	3.7	3.9	5.33
* 2222 K	121	189	2.0	0.28	3.5	2.2	2.3	6.64
* 1322 K	123	227	2.5	0.22	4.4	2.8	3.0	12
* 2322 K	123	227	2.5	0.37	2.6	1.7	1.8	17.4

Self-Aligning Ball Bearings

With adapter sleeve | Shaft 17–65 mm

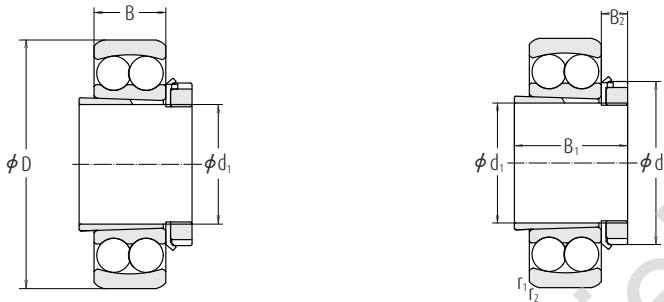


d_1 Shaft	Dimensions			Load ratings		Speed limits		Abbreviation for	
	D	B	$r_{1,2}$ min.	dyn. C	stat. C_0	Grease	Oil	Bearing	Sleeve
	mm			kN		(min ⁻¹)			
17	47	14	1.0	10.00	2.65	15 000	18 000	1204KTNG	H204
	47	18	1.0	14.30	3.55	14 000	17 000	2204EKTNG	H304
	52	15	1.1	12.50	3.35	13 000	16 000	1304KTNG	H304
	52	21	1.1	18.00	4.65	13 000	16 000	2304KJ	H2304
20	52	15	1.0	12.20	3.35	13 000	16 000	1205KTNG	H205
	52	18	1.0	17.00	4.40	12 000	15 000	2205EKTNG	H305
	62	17	1.1	18.00	5.00	11 000	14 000	1305KTNG	H305
	62	24	1.1	24.50	6.55	10 000	13 000	2305KTNG	H2305
25	62	16	1.0	15.60	4.65	11 000	14 000	1206KTNG	H206
	62	20	1.0	25.50	6.95	9 500	12 000	2206EKTNG	H306
	72	19	1.1	21.20	6.30	9 000	11 000	1306KTNG	H306
	72	27	1.1	31.50	8.65	8 500	10 000	2306KTNG	H2306
30	72	17	1.1	16.00	5.20	9 500	12 000	1207KTNG	H207
	72	23	1.1	32.00	9.00	8 000	9 500	2207EKTNG	H307
	80	21	1.5	25.00	8.00	8 000	9 500	1307KTNG	H307
	80	31	1.5	39.00	11.20	7 500	9 000	2307KTNG	H2307
35	80	18	1.1	19.30	6.55	8 500	10 000	1208KTNG	H208
	80	23	1.1	31.50	9.50	7 500	9 000	2208EKTNG	H308
	90	23	1.5	29.00	9.65	7 000	8 500	1308KTNG	H308
	90	33	1.5	45.00	13.40	6 700	8 000	2308KTNG	H2308
40	85	19	1.1	22.00	7.35	7 500	9 000	1209KTNG	H209
	85	23	1.1	28.00	9.00	7 000	8 500	2209EKTNG	H309
	100	25	1.5	38.00	12.90	6 300	7 500	1309KTNG	H309
	100	36	1.5	54.00	16.30	6 000	7 000	2309KTNG	H2309
45	90	20	1.1	22.90	8.15	7 000	8 500	1210KTNG	H210
	90	23	1.1	28.00	9.50	6 700	8 000	2210EKTNG	H310
	110	27	2.0	41.50	14.30	5 600	6 700	1310KTNG	H310
	110	40	2.0	64.00	20.00	5 300	6 300	2310KTNG	H2310
50	100	21	1.5	27.00	10.00	6 300	7 500	1211KTNG	H211
	100	25	1.5	39.00	12.70	5 600	6 700	2211EKTNG	H311
	120	29	2.0	51.00	18.00	5 000	6 000	1311KTNG	H311
	120	43	2.0	75.00	23.60	4 800	5 600	2311KTNG	H2311
55	110	22	1.5	30.00	11.60	5 600	6 700	1212KTNG	H212
	110	28	1.5	47.50	16.60	5 300	6 300	2212EKTNG	H312
	130	31	2.0	57.50	20.80	4 800	5 600	1312KJ	H312
	130	46	2.0	88.50	28.30	4 300	5 300	2312KJ	H2312
60	120	23	1.5	31.00	12.50	5 300	6 300	1213KTNG	H213
	120	31	1.5	57.00	19.30	4 500	5 300	2213EKTNG	H313
	140	33	2.1	62.50	22.90	4 300	5 300	1313KJ	H313
	140	48	2.1	96.50	32.50	4 000	4 800	2313KJ	H2313
65	130	25	1.5	39.00	15.60	4 800	5 600	1215KTNG	H215
	130	31	1.5	44.50	17.80	4 300	5 300	2215KJ	H315
	160	37	2.1	80.00	30.00	3 800	4 500	1315KJ	H315
	160	55	2.1	125.00	43.00	3 400	4 300	2315KJ	H2315




Dimensions (mm)			Abutment dimensions (mm)					Factors				Weight		
d ₃	B ₁	B ₂	d _a max	d _b min	D _a max	B _a min	r _a max	e	Y ₁ Fa/fr ≤ e	Y ₂ Fa/fr > e	Y ₀	Bearing	Sleeve	
													kg	
32	24	7	27	23	42.0	5	1.0	0.28	2.2	3.5	2.3	0.12	0.041	
32	28	7	27	23	42.0	5	1.0	0.44	1.5	2.2	1.5	0.14	0.045	
32	28	7	30	23	45.5	8	1.0	0.29	2.2	3.3	2.3	0.16	0.045	
32	31	7	28	24	45.5	5	1.0	0.51	1.2	1.9	1.3	0.21	0.049	
38	26	8	32	28	47.0	5	1.0	0.27	2.4	3.7	2.5	0.14	0.070	
38	29	8	32	28	47.0	5	1.0	0.35	1.8	2.8	1.9	0.16	0.075	
38	29	8	35	28	55.5	6	1.0	0.28	2.3	3.5	2.4	0.26	0.075	
38	35	8	34	30	55.5	5	1.0	0.48	1.3	2.0	1.4	0.34	0.087	
45	27	8	38	33	57.0	5	1.0	0.25	2.5	3.9	2.7	0.22	0.100	
45	31	8	39	33	57.0	5	1.0	0.30	2.1	3.3	2.2	0.24	0.110	
45	31	8	42	33	65.5	6	1.0	0.26	2.4	3.7	2.5	0.38	0.110	
45	38	8	40	35	65.5	5	1.0	0.45	1.4	2.2	1.5	0.49	0.130	
52	29	9	45	38	65.5	5	1.0	0.22	2.8	4.3	2.9	0.32	0.130	
52	35	9	44	39	65.5	5	1.0	0.30	2.1	3.3	2.2	0.40	0.140	
52	35	9	49	39	72.0	7	1.5	0.26	2.5	3.8	2.6	0.50	0.140	
52	43	9	45	40	72.0	5	1.5	0.47	1.4	2.1	1.4	0.66	0.170	
58	31	10	52	43	73.5	6	1.0	0.22	2.9	4.5	3.0	0.41	0.170	
58	36	10	50	44	73.5	6	1.0	0.26	2.4	3.8	2.5	0.49	0.190	
58	36	10	55	44	82.0	6	1.5	0.25	2.5	3.9	2.6	0.70	0.190	
58	46	10	51	45	82.0	6	1.5	0.43	1.5	2.3	1.5	0.90	0.220	
65	33	11	57	48	78.5	6	1.0	0.21	3.0	4.7	3.2	0.46	0.230	
65	39	11	56	50	78.5	8	1.0	0.26	2.4	3.8	2.5	0.53	0.250	
65	39	11	61	50	92.0	6	1.5	0.25	2.5	3.9	2.6	0.94	0.250	
65	50	11	57	50	92.0	6	1.5	0.43	1.5	2.3	1.6	1.20	0.280	
70	35	12	62	53	83.5	6	1.0	0.20	3.2	4.9	3.3	0.52	0.270	
70	42	12	61	55	83.5	10	1.0	0.24	2.6	4.1	2.7	0.58	0.300	
70	42	12	68	55	101.0	6	2.0	0.24	2.6	4.0	2.7	1.20	0.300	
70	55	12	63	56	101.0	6	2.0	0.43	1.5	2.3	1.5	1.60	0.360	
75	37	12	69	60	92.0	7	1.5	0.19	3.3	5.1	3.5	0.69	0.310	
75	45	12	68	60	92.0	11	1.5	0.22	2.9	4.5	2.1	0.79	0.390	
75	45	12	74	60	111.0	7	2.0	0.24	2.7	4.1	2.8	1.55	0.390	
75	59	12	69	61	111.0	7	2.0	0.42	1.5	2.3	1.6	2.05	0.420	
80	38	13	75	64	102.0	7	1.5	0.18	3.5	5.4	3.6	0.90	0.350	
80	47	13	73	65	102.0	9	1.5	0.23	2.7	4.2	2.8	1.10	0.390	
80	47	13	83	65	119.0	7	2.0	0.23	2.8	4.3	2.9	1.95	0.390	
80	62	13	74	66	119.0	7	2.0	0.40	1.6	2.4	1.7	2.60	0.490	
85	40	14	83	70	112.0	7	1.5	0.18	3.6	5.5	3.7	1.15	0.400	
85	50	14	79	70	112.0	9	1.5	0.23	2.8	4.3	2.9	1.45	0.460	
85	50	14	89	70	129.0	7	2.0	0.23	2.8	4.3	2.9	2.45	0.460	
85	65	14	82	72	129.0	7	2.0	0.39	1.6	2.5	1.7	3.25	0.550	
98	43	15	92	80	122.0	7	1.5	0.17	3.6	5.6	3.8	1.35	0.710	
98	55	15	90	80	122.0	13	1.5	0.25	2.5	3.9	2.6	1.60	0.830	
98	55	15	100	80	149.0	7	2.0	0.22	2.8	4.4	3.0	3.55	0.830	
98	73	15	94	82	149.0	7	2.0	0.38	1.6	2.6	1.7	5.15	1.050	

Self-Aligning Ball Bearings

Sealed on both sides | Bore 12–65 mm

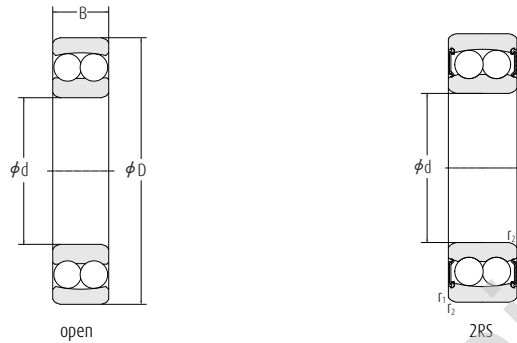



Dimensions				Load ratings		Speed limits	Abbreviation	
d	D	B	$r_{1,2}$ min	dyn. C	stat. C_0	Grease	Cylindrical bore	Tapered bore
mm				kN		min^{-1}		
12	32	14	0.6	5.60	1.27	16 000	2201-2RSTNG	—
15	35	14	0.6	7.50	1.76	15 000	2202-2RSTNG	—
	42	17	1.0	9.50	2.28	15 000	2302-2RSTN	—
17	40	16	0.6	8.00	2.04	14 000	2203-2RSTNG	—
	47	19	1.0	12.50	3.20	11 000	2303-2RSTN	—
20	47	18	1.0	10.00	2.65	11 000	2204-2RSTNG	2204K2RSTNG
	52	21	1.1	12.50	3.35	10 000	2304-2RSTNG	2304K2RSTNG
25	52	18	1.0	12.20	3.35	9 500	2205-2RSTNG	2205K2RSTNG
	62	24	1.1	18.00	5.00	8 000	2305-2RSTNG	2305K2RSTNG
30	62	20	1.0	15.60	4.65	8 000	2206-2RSTNG	2206K2RSTNG
	72	27	1.1	21.20	6.30	6 700	2306-2RSTNG	2306K2RSTNG
35	72	23	1.1	16.00	5.20	7 000	2207-2RSTNG	2207K2RSTNG
	80	31	1.5	25.00	8.00	6 000	2307-2RSTNG	2307K2RSTNG
40	80	23	1.1	19.30	6.55	6 300	2208-2RSTNG	2208K2RSTNG
	90	33	1.5	29.00	9.65	5 300	2308-2RSTNG	2308K2RSTNG
45	85	23	1.1	22.00	7.35	5 600	2209-2RSTNG	2209K2RSTNG
	100	36	1.5	38.00	12.90	4 800	2309-2RSTNG	2309K2RSTNG
50	90	23	1.1	22.80	8.15	5 300	2210-2RSTNG	2210K2RSTNG
	100	40	2.0	41.50	14.30	4 300	2310-2RSTNG	2310K2RSTNG
55	100	25	1.5	27.00	10.00	4 800	2211-2RSTNG	2211K2RSTNG
	120	43	2.0	51.00	18.00	3 800	2311-2RSTNG	2311K2RSTNG
60	110	28	1.5	30.00	11.60	4 300	2212-2RSTNG	2212K2RSTNG
	65	120	31	1.5	31.00	12.40	4 000	2213-2RSTNG



Abutment dimensions (mm)			Factors				Weight
d_a min	D_a max mm	r_a max	e	Y_1 $Fa/fr \leq e$	Y_2 $Fa/fr > e$	Y_0	kg
16.0	28.0	0.6	0.37	1.7	2.6	1.8	0.06
19.0	31.0	0.6	0.34	1.9	2.9	2.0	0.06
20.0	37.0	1.0	0.35	1.8	2.8	1.9	0.13
21.0	36.0	0.6	0.33	1.9	3.0	2.0	0.10
22.0	42.0	1.0	0.32	1.9	3.0	2.0	0.18
25.0	42.0	1.0	0.28	2.2	3.5	2.3	0.16
26.5	45.5	1.0	0.29	2.2	3.3	2.3	0.24
30.0	47.0	1.0	0.27	2.4	3.7	2.5	0.17
31.5	55.5	1.0	0.28	2.3	3.5	2.4	0.38
35.0	57.0	1.0	0.25	2.5	3.9	2.7	0.28
36.5	65.5	1.0	0.26	2.4	3.7	2.5	0.57
41.4	65.5	1.0	0.22	2.8	4.3	2.9	0.45
43.0	72.0	1.5	0.26	2.5	3.8	2.6	0.79
46.5	73.5	1.0	0.22	2.9	4.5	3.0	0.55
48.0	82.0	1.5	0.25	2.5	3.9	2.6	0.05
51.5	78.5	1.0	0.21	3.0	4.7	3.2	0.58
53.0	92.0	1.5	0.25	2.5	3.9	2.6	0.40
56.5	83.5	1.0	0.20	3.2	4.9	3.3	0.63
59.0	101.0	2.0	0.24	2.6	4.0	2.7	1.89
63.0	92.0	1.5	0.19	3.3	5.1	3.5	0.76
66.0	109.0	2.0	0.24	2.7	4.1	2.8	2.37
68.5	101.5	1.5	0.18	3.5	5.4	3.6	1.11
74.0	111.0	1.5	0.18	3.6	5.5	3.7	1.53


Self-Aligning Ball Bearings

With extended inner ring | Bore 20–60 mm



d	Dimensions			Load ratings		Speed limits Grease min ⁻¹	Abbreviation
	D	B	r _{1,2} min	dyn. C	stat. C ₀		
	mm				kN		
20	47	14	1.0	10.0	2.65	9 000	11204TNG
	52	15	1.0	12.5	3.20	8 500	11304TNG
25	52	15	1.0	12.2	3.35	8 000	11205TNG
	62	17	1.0	18.0	5.00	6 700	11305TNG
30	62	16	1.0	15.6	4.65	6 700	11206TNG
	72	19	1.0	21.2	6.30	5 600	11306TNG
35	72	17	1.1	16.0	5.20	5 600	11207TNG
	80	21	1.1	25.0	8.00	5 000	11307TNG
40	80	18	1.1	19.3	6.55	5 000	11208TNG
	90	23	1.1	29.0	9.65	4 500	11308TNG
45	85	19	1.1	22.0	7.35	4 500	11209TNG
	100	25	1.1	38.0	12.90	3 800	11309TNG
50	90	20	1.1	22.8	8.15	4 300	11210TNG
	110	27	1.1	41.5	14.30	3 600	11310TNG
55	100	21	1.5	27.0	10.00	4 000	11211TNG
	60	22	1.5	30.0	11.60	3 600	11212TNG


Note: The bore tolerances do not comply with DIN 620. The bore tolerance corresponds to the tolerance zone J7.



Dimensions		Abutment dimensions		Factors				Weight
d_2	B	D_a max	r_a max	e	Y_1 $F_a/Fr \leq e$	Y_2 $F_a/fr > e$	Y_0	kg
29.2	40	42.0	1.0	0.28	2.2	3.5	2.3	0.18
31.5	44	45.5	1.0	0.29	2.2	3.3	2.3	0.28
33.3	44	47.0	1.0	0.27	2.4	3.7	2.5	0.22
38.0	48	55.5	1.0	0.28	2.3	3.5	2.4	0.43
40.1	48	57.0	1.0	0.25	2.5	3.9	2.7	0.35
45.0	52	65.5	1.0	0.26	2.4	3.7	2.5	0.64
47.7	52	65.5	1.0	0.22	2.8	4.3	2.9	0.54
51.7	56	72.0	1.0	0.26	2.5	3.8	2.6	0.85
54.0	56	73.5	1.0	0.22	2.9	4.5	3.0	0.72
57.7	58	82.0	1.0	0.25	2.5	3.9	2.6	1.12
57.7	58	78.5	1.0	0.21	3.0	4.7	3.2	0.77
63.9	60	92.0	1.0	0.25	2.5	3.9	2.6	1.43
62.7	58	83.5	1.0	0.20	3.2	4.9	3.3	0.85
70.3	62	83.5	1.0	0.24	2.6	4.0	2.7	1.82
70.3	60	92.0	1.5	0.19	3.3	5.1	3.5	1.17
78.0	62	102.0	1.5	0.18	3.5	5.4	3.6	1.50


Self-Aligning Ball Bearings

Sleeve | Shaft 20–50 mm



Dimensions						Load ratings		Abbreviation
d Shaft	d_h	D	B	I	$r_{1,2}$ min	dyn. C	stat. C_0	
		mm				kN		
20	20	47	14	23	1.0	10.0	2.65	11504TNG
25	25	52	15	25	1.0	12.2	3.35	11505TNG
30	30	62	16	25	1.0	15.6	4.65	11506TNG
35	35	72	17	26	1.1	16.0	5.20	11507TNG
40	40	80	18	27	1.1	19.3	6.55	11508TNG
45	45	85	19	28	1.1	22.0	7.35	11509TNG
50	50	90	20	30	1.1	22.8	8.15	11510TNG

Note: The bore of the inner ring and its 1:15 taper do not comply with DIN 616.



Speed limits		Abutment dimensions		Factors				Weight
Grease min^{-1}	Oil	D_2 max	r_s max mm	e	γ_1 $F_a/F_r \leq e$	γ_2 $F_a/r_r > e$	γ_0	kg
15 000	18 000	41.0	1.0	0.28	2.2	3.5	2.3	0.120
13 000	16 000	46.5	1.0	0.27	2.4	3.7	2.5	0.144
11 000	14 000	56.5	1.0	0.25	2.5	3.9	2.7	0.227
9 500	12 000	65.0	1.0	0.22	2.8	4.3	2.9	0.335
8 500	10 000	73.0	1.0	0.22	2.9	4.5	3.0	0.435
7 500	9 000	78.0	1.0	0.21	3.0	4.7	3.2	0.480
7 000	8 500	83.0	1.0	0.20	3.2	4.9	3.3	0.540